

# Mechanical Contractor Applications

**NOTE:**

C6+ and G5 both can be used for oversized holes when repairing pumps and machinery anchoring.

## Machinery and Equipment

Pg. 71



• Removable

Pg. 39/46




- High Load Capacity
- Suitable for use close to edge of slab
- Ideal for moderate to hot climates
- Can be used for oversized holes

Pg. 23



- Vibration resistant
- Quick-Cure

## Pumps

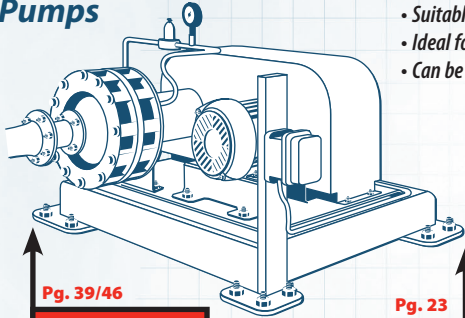

Pg. 39/46



- Corrosion resistant
- Vibration resistant
- NSF Approved

Pg. 23



- Quick-Cure
- Vibration Resistant

- Carbon, hot dipped galvanized, 304 and 316 stainless steel
- 1/4" to 1" diameters



Pg. 63/71

- Simple to install—drill hole and screw in
- Fire resistant



Pg. 88


## Ductwork/HVAC

## Heavy-Duty Pipe Support

- 2006 IBC, 2009 IBC, 2012 IBC, & 2015 IBC Compliant

- All seismic zone and cracked concrete approved

- Thru fixture fastening

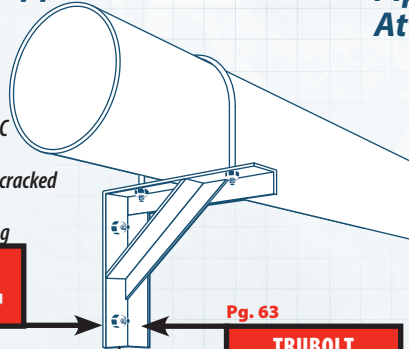

Pg. 69

Pg. 63




- Carbon, hot dipped galvanized, 304 and 316 stainless steel
- 1/4" to 1" diameters

Pg. 39/46



- High load capacity
- Corrosion resistant
- NSF Approved

## Pipe/Strut Attachment

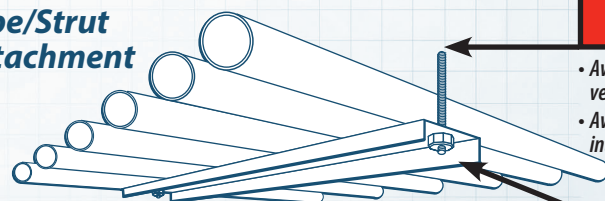

MULTI-SET DROP-IN

- Available in special 3/8" & 1/2" version for prestressed concrete
- Available in 1/4" thru 3/4" internal thread diameters

Pg. 63




- Available in carbon, hot dipped galvanized, 304 and 316 stainless steel

- Available in special 3/8" & 1/2" version for prestressed concrete
- Available in 1/4" thru 3/4" internal thread diameters



Pg. 80

## Pipe Support, Fire Sprinkler

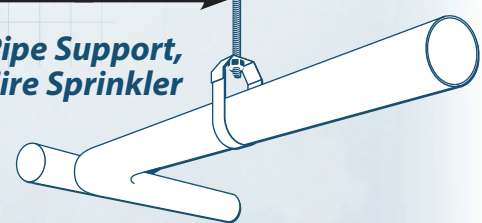

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.