

Selection Guide





Anchors for Concrete Applications

ANCHOR TYPE	KEY FEATURES	SIZE RANGE (Inches)
 Trubolt® Wedge Anchors (see page 65) 	<ul style="list-style-type: none"> 2015 IBC Compliant Seismic zone (A-B) approved Fully-threaded Length ID head stamped Stainless steel clip Through-fixture fastening 	Diameter: 1/4 – 1 Length: 1-3/4 – 12
 Trubolt®+ Seismic Wedge Anchors (see page 71)  ID STAMP	<ul style="list-style-type: none"> 2015 IBC Compliant All seismic zone (A-F) and cracked concrete approved Fully-threaded Length ID head stamped Through-fixture fastening 	Diameter: 3/8, 1/2, 5/8 & 3/4 Length: 3 – 8-1/2
 Trubolt®+ SS Seismic Wedge Anchors (see page 72) 	<ul style="list-style-type: none"> 2015 IBC Compliant ICC-ES ESR 2427 for Cracked and Uncracked Concrete Patented grooved clip design Meets ductility requirements of ACI 318 D.3.3 Fully threaded Anchor body and clip are Made in the U.S.A. 	Diameter: 1/2 and 5/8 Length: 3-3/4 - 7
 Large Diameter Tapcon (LDT) and LDTX Self-Threading Anchor (see page 74) 	<ul style="list-style-type: none"> Anti-rotation serrated washer Extra large hex washer head Length ID head stamped Through-fixture fastening 	LDT with Zinc Plating Diameter: 3/8 – 3/4 Length: 1-3/4 – 6-1/4 LDTX with EnvireX Coating Diameter: 3/8 & 1/2 Length: 3 – 5
 Boa™ Coil Expansion Anchors (see page 78) 	<ul style="list-style-type: none"> Heavy-Duty, Reusable Fastening Easy installation Removable High shear strength Zinc plated carbon steel to ASTM B633, SC1, Type III 	Diameter: 1/2 – 3/4 Length: 3 – 6
 Multi-Set II® Drop-In Anchors (see page 79)  RM RL RX CL	<ul style="list-style-type: none"> RM: Flanged body to keep anchor flush with surface of concrete RL: Non-flanged body for recessed setting RX: Designed for hollow core and post tension concrete CL: Designed for one-sided forming, accepts coil rod 	Diameter: 1/4 – 3/4 Length: 1 – 3-3/16 Diameter: 1/4 – 3/4 Length: 1 – 3-3/16 Diameter: 3/8 & 1/2 Length: 3/4 - 1 Diameter: 1/2 & 3/4 Length: 2 & 3-3/16
 Dynabolt® Masonry Sleeve Anchors (see page 84)  For both Hollow and Solid Concrete	<ul style="list-style-type: none"> Concrete, block and brick Many choices of head styles Through-fixture fastening Available in 304 stainless steel 	Diameter: 1/4 – 3/4 Length: 5/8 – 6-1/4

	CORROSION RESISTANCE	PERFORMANCE	HEAD STYLES	APPROVALS/LISTINGS
Trubolt cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Hot dipped galvanized to ASTM A-153 Type 304 and 316 stainless steel 	Ultimate Pullout Performance in 4000 psi Concrete up to 26,540 lbs. (1" diameter)	Hex nut Tie-Wire version	ICC Evaluation Service, Inc. ESR-2251 Underwriters Laboratories Factory Mutual Caltrans Meets or exceeds U.S. Government G.S.A. Specification A-A-1923A Type 4 (formerly GSA: FF-S-325 Group II, Type 4, Class 1)
Trubolt+ cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III 	Pullout strength of 4,980 lbs in 2,500 psi Cracked Concrete (1/2" diameter).	Hex nut	ICC Evaluation Service, Inc. # ESR-2427 -Category 1 performance rating -2015 IBC compliant -Meets ACI 318 ductility requirements -Tested in accordance with ACI 355.2 & ICC-ES AC193 -Listed for use in seismic zones A, B, C, D, E, & F -3/8", 1/2", 5/8" and 3/4" diameter anchors listed in ESR-2427 City of Los Angeles - #RR25867 Florida Building Code (FBC)
Trubolt+ SS cont'd	<ul style="list-style-type: none"> Stainless Steel AISI 316 	Pullout strength of 4,980 lbs in 2,500 psi Cracked Concrete (1/2" diameter).	Hex nut	ICC-ES ESR 2427 for cracked and uncracked concrete Approved for use in ALL SEISMIC ZONES (A-F) 2015 International Building Code (IBC) 2015 International Residential Code (IRC) Florida Building Code (FBC)
LDT cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B695 & B633 Type 410 stainless steel <hr/> <ul style="list-style-type: none"> EnvireX coating <p>Approved for use in ACQ and MCQ lumber* *Excessive content of copper in the ACQ and MCQ lumber may affect the anchor finish.</p>	Ultimate Pullout Performance in 4,000 psi Concrete up to 23,266 lbs. (3/4" diameter)	Finished bolt style	1,000 hours salt spray ASTM B117
Boa Coil cont'd	<ul style="list-style-type: none"> Zinc plated carbon steel to ASTM B633, SC1, Type III 	Ultimate Pullout Performance in 4000 psi Concrete up to 38,500 lbs. (3/4" diameter)	Finished bolt style	
Multi-Set II Drop-In cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Type 304 and 316 stainless steel 	Ultimate Pullout Performance in 4000 psi Concrete up to 9,480 lbs. (3/4" diameter)	RM: Flanged body RL: Non-flanged body Use any bolt or threaded rod	GSA: A-A-55614 Type 1 (Formerly GSA: FF-S-325 Group VIII) Underwriters Laboratories Factory Mutual Caltrans
Dynabolt cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Type 304 stainless steel 	Ultimate Pullout Performance in 4000 psi Concrete up to 8,900 lbs. (3/4" diameter)	Flat head Hex nut Acorn nut Tie-Wire Round head Threshold flat head	GSA: A-A-1922A (Formerly GSA: FF-S-325 Group II, Type 3, Class 3) Factory Mutual

Anchors for Concrete Applications

continued from pages 50-51

ANCHOR TYPE	KEY FEATURES		SIZE RANGE (Inches)
<div> Tapcon® Concrete Anchors with Advanced Threadform Technology™ </div> <div>  </div> <div> Original (see page 90) Maxi-Set (see page 91) SCOTS (see page 93) XL (see page 95) StormGuard (see page 97) </div>			
<div> SAMMYS® Hurricane Protection Anchor (see page 99) </div> <div>  </div>	<ul style="list-style-type: none"> Original Tapcon 1/4" dia. anchor with Blue Climaseal™ Quick and easy secure shutter installations 		Diameter: 1/4 Length: 1-1/4 – 6
<div> Hammer-Set™ Nail-drive Anchors (see page 100) </div> <div>  </div>	<ul style="list-style-type: none"> Easy installation Low profile head Through-fixture fastening 		Diameter: 3/16 & 1/4 Length: 7/8 – 2
<div> Poly-Set® All-purpose plastic plug anchors (see page 101) </div> <div>  </div> <div> For Concrete, Hollow and Drywall </div>	<ul style="list-style-type: none"> Unique twisting action Resistant to moisture, chemicals and atmospheric conditions Available in pre-packaged kits 		Diameter: 3/16 – 1/4 Length: 1-1/4 – 1-7/16 3/16" uses #6 – 8 screw 1/4" uses #10 – 12 screw

	CORROSION RESISTANCE	PERFORMANCE	HEAD STYLES	APPROVALS/LISTINGS
Tapcon <i>cont'd</i>	<ul style="list-style-type: none"> Patented Trade Secret Climaseal® coating Type 410 stainless steel <p>The above is for the Original and 410 SS Tapcon only. For data on other Tapcon products see their product pages as follows: Tapcon Maxi-Set on page 94, Tapcon SCOTS on page 94, Tapcon XL on page 98, and Tapcon StormGuard on page 100.</p>	Ultimate Pullout Performance in 4000 psi Concrete up to 2,380 lbs.	Hex head Phillips flat head	Blue Climaseal™ ICC Evaluation Service, Inc.— ESR-1671 ICC Evaluation Service, Inc.— ESR-2202 Miami-Dade County Florida Building Code 410 Stainless Steel Miami-Dade County Florida Building Code
SAMMYS Anchor <i>cont'd</i>	<ul style="list-style-type: none"> Blue Climaseal™ 	Ultimate Pullout Performance in 4000 psi Concrete at 3,100 lbs. (2-1/4" Embedment)	Threaded Cap	Miami Dade County
Hammer-Set <i>cont'd</i>	<ul style="list-style-type: none"> Zinc alloy 	Ultimate Pullout Performance in 4000 psi Concrete up to 793 lbs.	Mushroom head	GSA: A-A-1925A Type 1 (zinc mushroom) (Formerly GSA: FF-S-325 Group V, Type 2, Class 3)
Poly-Set <i>cont'd</i>	<ul style="list-style-type: none"> Polyethylene Anchor (accepts corrosion resistant screw of your choice) 		Kit comes with phillips head screw (accepts screw style of your choice)	

Because applications vary, ITW RED HEAD cannot guarantee the performance of this product. Each customer assumes all responsibility and risk for the use of this product. The safe handling and the suitability of this product for use is the sole responsibility of the customer. Specific job site conditions should be considered when selecting the proper product. Should you have any questions, please call the Technical Assistance Department at 800-848-5611.

Trubolt® Wedge Anchors

**Dependable,
Heavy-Duty,
Inspectable,
Wedge Type
Expansion
Anchor**



**2015 IBC
Compliant**

Trubolt®
Wedge Anchors

DESCRIPTION/SUGGESTED SPECIFICATIONS

Wedge Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE

Trubolt Wedge anchors feature a stainless steel expansion clip, threaded stud body, nut and washer. Anchor bodies are made of plated carbon steel, hot-dipped galvanized carbon steel, type 304 stainless steel or type 316 stainless steel as identified in the drawings or other notations.



**Trubolt
Wedge
Anchor**

The exposed end of the anchor is stamped to identify anchor length. Stampings should be preserved during installation for any subsequent embedment verification.

Use carbide tipped hammer drill bits made in accordance with ANSI B212.15-1994 to install anchors.

Anchors are tested to ACI 355.2 and ICC-ES AC193. Anchors are listed by the following agencies as required by the local building code: ICC-ES, UL, FM, City of Los Angeles, California State Fire Marshal and Caltrans.

See Appendix B (pages 106-107) for performance values in accordance to 2015 IBC.


ADVANTAGES

- 2015 International Building Code (IBC) Compliant for 1/4" through 1/2" diameters-carbon steel
- Versatile fully threaded design is standard on sizes up to 3/4" diameter and 10" length
- Anchor diameter equals hole diameter
- Standard carbon and stainless steel anchors
- Non bottom-bearing, may be used in hole depth exceeding anchor length
- Can be installed through the work fixture, eliminating hole spotting
- Inspectable torque values, indicating proper installation


Fully Threaded Advantage

Trubolt's fully threaded feature eliminates subsurface obstruction problems.

Fully threaded design accommodates various material thicknesses at the same embedment. One anchor length saves time and money.

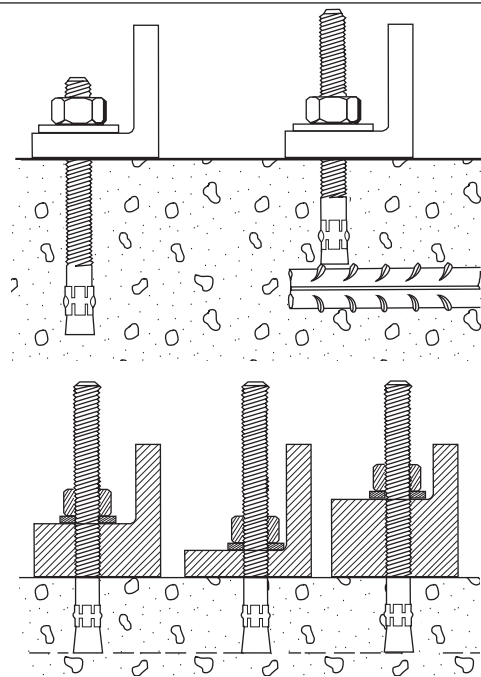

APPLICATIONS



Anchoring machinery and conveyors is a common wedge anchor application. The Trubolt is fully threaded to allow a large range of embedment and fixture thickness.

LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR	CODE	LENGTH OF ANCHOR
A	1-1/2 < 2 (38.1 < 50.8)	K	6-1/2 < 7 (165.1 < 177.8)
B	2 < 2-1/2 (50.8 < 63.5)	L	7 < 7-1/2 (177.8 < 190.5)
C	2-1/2 < 3 (63.5 < 76.2)	M	7-1/2 < 8 (190.5 < 203.2)
D	3 < 3-1/2 (76.2 < 88.9)	N	8 < 8-1/2 (203.2 < 215.9)
E	3-1/2 < 4 (88.9 < 101.6)	O	8-1/2 < 9 (215.9 < 228.6)
F	4 < 4-1/2 (101.6 < 114.3)	P	9 < 9-1/2 (228.6 < 241.3)
G	4-1/2 < 5 (114.3 < 127.0)	Q	9-1/2 < 10 (241.3 < 254.0)
H	5 < 5-1/2 (127.0 < 139.7)	R	10 < 11 (254.0 < 279.4)
I	5-1/2 < 6 (139.7 < 152.4)	S	11 < 12 (279.4 < 304.8)
J	6 < 6-1/2 (152.4 < 165.1)	T	12 < 13 (304.8 < 330.2)

*Located on top of anchor for easy inspection.



FEATURES



Length ID Head Stamp—provides for embedment inspection after installation

Fully Threaded Design

Cold-Formed—manufacturing process adds strength

Stainless steel split expansion ring

Anchor Body—available in zinc-plated steel, hot-dipped galvanized steel, 304 stainless steel and 316 stainless steel

TRUBOLT® WEDGE ANCHOR

APPROVALS/LISTINGS

Trubolt® Wedge Anchors

ICC Evaluation Service, Inc. ESR-2251

- Category 1 performance rating
- 2015 IBC compliant
- Meets ACI 318 ductility requirements
- Tested in accordance with ACI 355.2 and ICC-ES AC193
- For use in seismic zones A & B
- 1/4", 3/8" & 1/2" diameter anchors listed in ESR-2251

Underwriters Laboratories


Factory Mutual

Caltrans

Meets or exceeds U.S. Government G.S.A. Specification A-A-1923A Type 4 (formerly GSA: FF-S-325 Group II, Type 4, Class 1)

Made in USA

INSTALLATION STEPS



1. Select a carbide drill bit with a diameter equal to the anchor diameter. Drill hole to any depth exceeding the desired embedment. See chart for minimum recommended embedment.



2. Clean hole or continue drilling additional depth to accommodate drill fines.



3. Assemble washer and nut, leaving top of stud exposed through nut. Drive anchor through material to be fastened until washer is flush to surface of material.



4. Expand anchor by tightening nut 3-5 turns past the hand tight position, or to the specified torque requirement.

**** ONLY FOR USE IN CONCRETE ****

SELECTION CHARTS

Trubolt Carbon Steel with Zinc Plating




Typical Applications—
Structural Columns,
Machinery, Equipment, etc.

Environment—Interior
(non-corrosive)

Level of Corrosion—Low

Tie Wire Wedge for hanging suspended ceiling

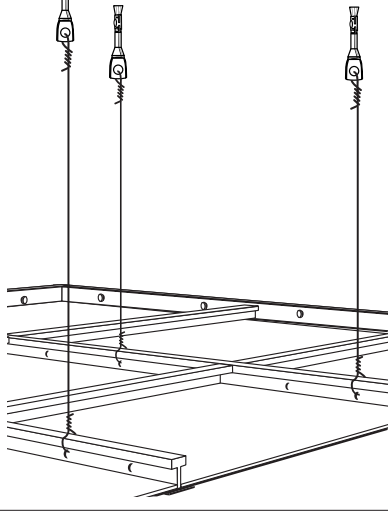

Meets ASTM B633 SC1, Type III specifications for electroplating of 5um = .0002" thickness.
This material is well suited for non-corrosive environments.

PART NUMBER	THREAD LENGTH In. (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
WS-1416	3/4 (19.1)	1/4" - 20	1-3/4 (44.5)	3/8 (9.5)	100/ 3.1	1000/ 32
WS-1422	1-1/4 (31.8)		2-1/4 (57.2)	7/8 (22.2)	100/ 3.6	1000/ 37
WS-1432	2-1/4 (57.2)		3-1/4 (82.6)	1-7/8 (47.6)	100/ 4.7	800/ 39
WS-3822	1-1/8 (28.6)	3/8" - 16	2-1/4 (57.2)	3/8 (9.5)	50/ 4.1	500/ 41
WS-3826	1-5/8 (41.3)		2-3/4 (69.9)	7/8 (22.2)	50/ 4.7	400/ 39
WS-3830	1-3/4 (44.5)		3 (76.2)	1-1/8 (28.6)	50/ 5.0	400/ 41
WS-3836	2-1/2 (63.5)		3-3/4 (95.3)	1-7/8 (47.6)	50/ 5.9	300/ 36
WS-3850	3-3/4 (95.2)		5 (127.0)	3-1/8 (79.4)	50/ 7.4	250/ 38
WS-3870	3-7/8 (98.4)		7 (177.8)	5-1/8 (130.2)	50/ 10.4	250/ 53
WS-1226	1-1/4 (31.8)	1/2" - 13	2-3/4 (69.9)	1/8 (3.2)	25/ 4.6	200/ 38
WS-1236	2-1/4 (57.2)		3-3/4 (95.3)	1 (25.4)	25/ 5.7	150/ 35
WS-1242	2-3/4 (69.9)		4-1/4 (108.0)	1-1/2 (38.1)	25/ 6.2	150/ 38
WS-1244	3 (76.2)		4-1/2 (114.3)	1-3/4 (44.5)	25/ 6.5	150/ 39
WS-1254	4 (101.6)		5-1/2 (139.7)	2-3/4 (69.9)	25/ 7.7	150/ 47
WS-1270	5-1/2 (139.7)		7 (177.8)	4-1/4 (108.0)	25/ 9.3	150/ 57
WS-5834	1-3/4 (44.5)	5/8" - 11	3-1/2 (88.9)	1/8 (3.2)	10/ 3.6	100/ 37
WS-5842	2-1/2 (63.5)		4-1/4 (108.0)	7/8 (22.2)	10/ 4.1	100/ 42
WS-5850	3-1/4 (82.6)		5 (127.0)	1-5/8 (41.3)	10/ 4.7	100/ 48
WS-5860	4-1/4 (107.9)		6 (152.4)	2-5/8 (66.7)	10/ 5.4	50/ 28
WS-5870	5-1/4 (133.4)		7 (177.8)	3-5/8 (92.1)	10/ 6.2	30/ 19
WS-5884	5-3/4 (146.0)		8-1/2 (215.9)	5-1/8 (130.2)	10/ 8.0	30/ 25
WS-58100	5-3/4 (146.0)		10 (254.0)	6-5/8 (168.3)	10/ 9.4	30/ 29
WS-3442	2-3/8 (60.3)	3/4" - 10	4-1/4 (108.0)	1/4 (31.8)	10/ 6.8	60/ 42
WS-3446	2-7/8 (73.0)		4-3/4 (120.7)	3/4 (19.1)	10/ 7.4	60/ 45
WS-3454	3-5/8 (92.1)		5-1/2 (139.7)	1-1/2 (38.1)	10/ 8.1	50/ 41
WS-3462	4-3/8 (111.1)		6-1/4 (158.8)	2-1/4 (57.2)	10/ 9.1	30/ 28
WS-3470	5-1/8 (130.2)		7 (177.8)	3 (76.2)	10/ 9.7	30/ 30
WS-3484	5-3/4 (146.0)		8-1/2 (215.9)	4-1/2 (114.3)	10/ 12.3	30/ 38
WS-34100	5-3/4 (146.0)		10 (254.0)	6 (152.4)	10/ 14.0	30/ 43
WS-34120	1-3/4 (44.5)		12 (304.8)	8 (203.2)	10/ 16.6	30/ 51
WS-7860	2-1/2 (63.5)	7/8" - 9	6 (152.4)	1-3/8 (34.9)	5/ 6.3	25/ 32
WS-7880	2-1/2 (63.5)		8 (203.2)	3-3/8 (85.7)	5/ 8.1	15/ 25
WS-78100	2-1/2 (63.5)		10 (254.0)	5-3/8 (136.5)	5/ 9.8	15/ 30
WS-10060	2-1/2 (63.5)	1" - 8	6 (152.4)	1/2 (12.7)	5/ 8.3	25/ 43
WS-10090	2-1/2 (63.5)		9 (228.6)	3-1/2 (88.9)	5/ 11.6	15/ 36
WS-100120	2-1/2 (63.5)		12 (304.8)	6-1/2 (165.1)	5/ 15.0	15/ 46
TIE WIRE						
TW-1400	N/A	1/4"	2-1/8 (54.0)	9/32-hole (7.1)	100/ 3.6	1000/ 36
TW-1400 K	N/A		2-1/8 (54.0)	9/32-hole (7.1)	BULK	1500/ 73

SELECTION CHARTS

Trubolt Carbon Steel with Hot-Dipped Galvanizing



Typical Applications—
Railings, Signage, Awnings, etc.

Environment—Rural/
Suburban (exterior environ-
ment—
essentially unpolluted areas)

Level of Corrosion—
Low to Medium

Meets ASTM A153 Class specifications for hot-dipped galvanizing > 45um = .002". It is highly recommended for damp, humid environments near coastal regions. Hot-dipped galvanized Trubolts have a coating thickness of zinc that is almost 10 times as thick as electroplating. This creates greater corrosion resistance at a minimal cost.

PART NUMBER	THREAD LENGTH In. (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
WS-1226G	1-1/4 (31.8)	1/2" - 13	2-3/4 (69.9)	1/8 (3.2)	25/ 4.8	200/ 39
WS-1242G	2-3/4 (69.9)		4-1/4 (108.0)	1-1/2 (38.1)	25/ 6.7	150/ 41
WS-1254G	4 (101.6)		5-1/2 (139.7)	2-3/4 (69.9)	25/ 8.0	150/ 49
WS-1270G	5-1/2 (139.7)		7 (177.8)	4-1/4 (108.0)	25/ 9.7	150/ 59
WS-5834G	1-3/4 (44.5)	5/8" - 11	3-1/2 (88.9)	1/8 (3.2)	10/ 3.7	100/ 38
WS-5860G	4-1/4 (107.9)		6 (152.4)	2-5/8 (66.7)	10/ 5.6	50/ 29
WS-3446G	2-7/8 (73.0)	3/4" - 10	4-3/4 (120.7)	3/4 (19.1)	10/ 7.5	60/ 46
WS-3454G	3-5/8 (92.1)		5-1/2 (139.7)	1-1/2 (38.1)	10/ 8.4	50/ 42
WS-3484G	5-3/4 (146.0)		8-1/2 (215.9)	4-1/2 (114.3)	10/ 12.5	30/ 38

SELECTION CHARTS

Trubolt Type 304 Stainless Steel



Typical Applications—
Cladding, Stadium Seating, etc.

Environment—Urban
(slight to moderate
degree of pollution)

Level of Corrosion—Medium

Serves many applications well. It withstands rusting in architectural and food processing environments and resists organic chemicals, dye stuffs and many inorganic chemicals.

PART NUMBER	THREAD LENGTH In. (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
WW-1416	3/4 (19.1)	1/4" - 20	1-3/4 (44.5)	3/8 (9.5)	100/ 3.2	1000/ 32
WW-1422	1-1/4 (31.8)		2-1/4 (57.2)	7/8 (22.2)	100/ 3.7	1000/ 37
WW-1432	2-1/4 (57.2)		3-1/4 (82.6)	1-7/8 (47.6)	100/ 4.8	800/ 39
WW-3822	1-1/8 (28.6)	3/8" - 16	2-1/4 (57.2)	3/8 (9.5)	50/ 4.1	500/ 41
WW-3826	1-5/8 (41.3)		2-3/4 (69.9)	7/8 (22.2)	50/ 4.8	400/ 39
WW-3830	1-3/4 (44.5)		3 (76.2)	1-1/8 (28.6)	50/ 5.1	400/ 42
WW-3836	2-1/2 (63.5)		3-3/4 (95.3)	1-7/8 (47.6)	50/ 6.0	300/ 37
WW-3850	3-3/4 (95.3)		5 (127.0)	3-1/8 (79.4)	50/ 7.5	250/ 39
WW-1226	1-1/4 (31.8)	1/2" - 13	2-3/4 (69.9)	1/8 (3.2)	25/ 4.7	200/ 38
WW-1236	2-1/4 (57.2)		3-3/4 (95.3)	1 (25.4)	25/ 5.8	150/ 36
WW-1242	2-3/4 (69.9)		4-1/4 (108.0)	1-1/2 (38.1)	25/ 6.3	150/ 39
WW-1254	3 (76.2)		5-1/2 (139.7)	2-3/4 (69.9)	25/ 7.7	150/ 47
WW-1270	3-1/2 (88.9)		7 (177.8)	4-1/4 (108.0)	25/ 9.4	150/ 57
WW-5834	1-3/4 (44.5)	5/8" - 11	3-1/2 (88.9)	1/8 (3.2)	10/ 3.6	100/ 37
WW-5842	2-1/2 (63.5)		4-1/4 (108.0)	7/8 (22.2)	10/ 4.2	100/ 43
WW-5850	3-1/4 (82.6)		5 (127.0)	1-5/8 (41.3)	10/ 4.8	100/ 49
WW-5860	4-1/4 (107.9)		6 (152.4)	2-5/8 (66.7)	10/ 5.5	50/ 28
WW-5870	3-1/2 (88.9)		7 (177.8)	3-5/8 (92.1)	10/ 6.2	30/ 20
WW-5884	3-1/2 (88.9)		8-1/2 (215.9)	5-1/8 (130.2)	10/ 8.0	30/ 25
WW-3446	2-7/8 (73.0)	3/4" - 10	4-3/4 (120.7)	3/4 (19.1)	10/ 6.7	60/ 41
WW-3454	3-5/8 (92.1)		5-1/2 (139.7)	1-1/2 (38.1)	10/ 7.5	50/ 38
WW-3470	3-1/2 (88.9)		7 (177.8)	3 (76.2)	10/ 9.2	30/ 28
WW-3484	3-1/2 (88.9)		8-1/2 (215.9)	4-1/2 (114.3)	10/ 12.3	30/ 38
WW-34100	1-3/4 (44.5)		10 (254.0)	6 (152.4)	10/ 13.5	30/ 42
WW-10060	2-1/2 (63.5)	1" - 8	6 (152.4)	1/2 (12.7)	5/ 8.3	25/ 43
WW-10090	2-1/2 (63.5)		9 (228.6)	3-1/2 (88.9)	5/ 11.4	15/ 35

* For continuous extreme low temperature applications, use stainless steel.

SELECTION CHARTS

Trubolt Type 316 Stainless Steel



Typical Applications—
Pumps, Diffusers, Gates,
Weir Plates, etc.

Environment—Industrial
(moderate to heavy
atmospheric pollution)

Level of Corrosion—
Medium to High



Typical Applications—
Tunnels, Dams, Tiles,
Lighting Fixtures, etc.

Environment—
Marine (heavy atmospheric
pollution)

Level of Corrosion—High

Contains more nickel and chromium than Type 304, and 2%-3% molybdenum, which gives it better corrosion resistance. It is especially more effective in chloride environments that tend to cause pitting.

PART NUMBER	THREAD LENGTH In. (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
SWW-1422	1-1/4 (31.8)	1/4" - 20	2-1/4 (57.2)	7/8 (22.2)	100/ 3.7	1000/ 37
SWW-1432	2-1/4 (57.2)		3-1/4 (82.6)	1-1/8 (28.6)	100/ 4.8	1000/ 39
SWW-3822	1-1/8 (28.6)	3/8" - 16	2-1/4 (57.2)	3/8 (9.5)	50/ 4.1	500/ 41
SWW-3826	1-5/8 (41.3)		2-3/4 (69.9)	7/8 (22.2)	50/ 4.8	400/ 39
SWW-3830	1-3/4 (44.5)		3 (76.2)	1-1/8 (28.6)	50/ 5.2	400/ 42
SWW-3836	2-1/2 (63.5)		3-3/4 (95.5)	1-7/8 (47.6)	50/ 6.0	300/ 37
SWW-3850	3-3/4 (95.3)		5 (127.0)	3-1/8 (79.4)	50/ 7.5	250/ 39
SWW-1226	1-1/4 (31.8)	1/2" - 13	2-3/4 (69.9)	1/8 (3.2)	25/ 4.7	200/ 39
SWW-1236	2-1/4 (57.2)		3-3/4 (95.3)	1 (25.4)	25/ 5.8	150/ 36
SWW-1242	2-3/4 (69.9)		4-1/4 (108.0)	1-1/2 (38.1)	25/ 6.5	150/ 40
SWW-1254	3 (76.2)		5-1/2 (139.7)	2-3/4 (69.9)	25/ 7.8	150/ 48
SWW-5842	2-1/2 (63.5)	5/8" - 11	4-1/4 (108.0)	7/8 (22.2)	10/ 4.2	100/ 43
SWW-5850	3-1/4 (82.6)		5 (127.0)	1-5/8 (41.3)	10/ 4.8	100/ 49
SWW-5870	3-1/2 (88.9)		7 (177.8)	3-5/8 (92.1)	10/ 6.7	30/ 21

* For continuous extreme low temperature applications, use stainless steel.



PERFORMANCE TABLE

Trubolt

Wedge Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Concrete*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	f'c = 2000 PSI (13.8 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 6000 PSI (41.4 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	4 (5.4)	1-1/8 (28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	1,180 (5.2)	1,400 (6.2)	1,780 (7.9)	1,400 (6.2)	1,900 (8.5)	1,400 (6.2)
		1-15/16 (49.2)		2,100 (9.3)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)
		2-1/8 (54.0)		2,260 (10.1)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)
3/8 (9.5)	25 (33.9)	1-1/2 (38.1)		1,620 (7.5)	2,320 (10.3)	2,240 (10.0)	2,620 (11.7)	2,840 (12.6)	3,160 (14.1)
		3 (76.2)		3,480 (15.5)	4,000 (17.8)	5,940 (26.4)	4,140 (18.4)	6,120 (27.2)	4,500 (20.0)
		4 (101.6)		4,800 (21.4)	4,000 (17.8)	5,940 (26.4)	4,140 (18.4)	6,120 (27.2)	4,500 (20.0)
1/2 (12.7)	55 (74.6)	2-1/4 (57.2)		3,455 (20.7)	4,760 (21.2)	4,920 (22.7)	4,760 (21.2)	6,025 (31.3)	7,040 (31.3)
		4-1/8 (104.8)		4,660 (20.7)	7,240 (32.2)	9,640 (42.9)	7,240 (32.2)	10,820 (48.1)	8,160 (36.3)
		6 (152.4)		5,340 (23.8)	7,240 (32.2)	9,640 (42.9)	7,240 (32.2)	10,820 (48.1)	8,160 (36.3)
5/8 (15.9)	90 (122.0)	2-3/4 (69.9)		5,185 (29.3)	7,120 (31.7)	7,180 (31.9)	7,120 (31.7)	9,225 (43.2)	9,616 (42.8)
		5-1/8 (130.2)		6,580 (29.3)	9,600 (42.7)	14,920 (66.4)	11,900 (52.9)	16,380 (72.9)	12,520 (55.7)
		7-1/2 (190.5)		7,060 (31.4)	9,600 (42.7)	15,020 (66.8)	11,900 (52.9)	16,380 (72.9)	12,520 (55.7)
3/4 (19.1)	110 (149.2)	3-1/4 (82.6)		6,765 (31.7)	10,120 (45.0)	10,840 (48.2)	13,720 (61.0)	13,300 (59.2)	15,980 (71.1)
		6-5/8 (168.3)		10,980 (48.8)	20,320 (90.4)	17,700 (78.7)	23,740 (105.6)	20,260 (90.1)	23,740 (105.6)
		10 (254.0)		10,980 (48.8)	20,320 (90.4)	17,880 (79.5)	23,740 (105.6)	23,580 (104.9)	23,740 (105.6)
7/8 (22.2)	250 (339.0)	3-3/4 (95.3)		9,290 (42.3)	13,160 (58.5)	14,740 (65.6)	16,580 (73.8)	17,420 (77.5)	19,160 (85.2)
		6-1/4 (158.8)		14,660 (65.2)	20,880 (92.9)	20,940 (93.1)	28,800 (128.1)	24,360 (108.4)	28,800 (128.1)
		8 (203.2)		14,660 (65.2)	20,880 (92.9)	20,940 (93.1)	28,800 (128.1)	24,360 (108.4)	28,800 (128.1)
1 (25.4)	300 (406.7)	4-1/2 (114.3)		11,770 (62.0)	16,080 (71.5)	19,245 (89.8)	22,820 (101.5)	21,180 (94.2)	24,480 (108.9)
		7-3/8 (187.3)		14,600 (64.9)	28,680 (127.6)	23,980 (106.7)	37,940 (168.8)	33,260 (148.0)	38,080 (169.4)
		9-1/2 (241.3)		18,700 (83.2)	28,680 (127.6)	26,540 (118.1)	37,940 (168.8)	33,260 (148.0)	38,080 (169.4)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

* For Tie-Wire Wedge Anchor, TW-1400, use tension data from 1/4" diameter with 1-1/8" embedment.

* For continuous extreme low temperature applications, use stainless steel.

PERFORMANCE TABLE

Trubolt

Wedge Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Lightweight Concrete*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	LIGHTWEIGHT CONCRETE f'c = 3000 PSI (20.7 MPa)		LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL f'c = 3000 PSI (20.7 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	25 (33.9)	1-1/2 (38.1)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	1,175 (5.2)	1,480 (6.6)	1,900 (8.5)	3,160 (14.1)
		3 (76.2)		2,825 (12.6)	2,440 (10.9)	2,840 (12.6)	4,000 (17.8)
1/2 (12.7)	55 (74.6)	2-1/4 (57.2)		2,925 (13.0)	2,855 (12.7)	3,400 (15.1)	5,380 (23.9)
		3 (76.2)		3,470 (15.4)	3,450 (15.3)	4,480 (19.9)	6,620 (29.4)
		4 (101.6)		4,290 (19.1)	3,450 (15.3)	4,800 (21.4)	6,440 (28.6)
5/8 (15.9)	90 (122.0)	3 (76.2)		4,375 (19.5)	4,360 (19.4)	4,720 (21.0)	5,500 (24.5)
		5 (127.0)		6,350 (28.2)	6,335 (28.2)	6,580 (29.3)	9,140 (40.7)
3/4 (19.1)	110 (149.2)	3-1/4 (82.6)		5,390 (24.0)	7,150 (31.8)	5,840 (26.0)	8,880 (39.5)
		5-1/4 (133.4)		7,295 (32.5)	10,750 (47.8)	7,040 (31.3)	N/A

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Recommended Edge and Spacing Distance Requirements for Shear Loads*

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .60 In. (mm)	MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .20 In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING BETWEEN ANCHORS In. (mm) LOAD FACTOR APPLIED = .40
1/4 (6.4)	1-1/8 (28.6) 1-15/16 (49.2)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2 (50.8) 1-15/16 (49.2)	1-5/16 (33.3) 1 (25.4)	N/A N/A	3-15/16 (100.0) 3-7/8 (98.4)	2 (50.8) 1-15/16 (49.2)
3/8 (9.5)	1-1/2 (38.1) 3 (76.2)		2-5/8 (66.7) 3-3/4 (95.3)	1-3/4 (44.5) 3 (76.2)	N/A 1-1/2 (38.1)	5-1/4 (133.4) 6 (152.4)	2-5/8 (66.7) 3 (76.2)
1/2 (12.7)	2-1/4 (57.2) 4-1/8 (104.8)		3-15/16 (100.0) 5-3/16 (131.8)	2-9/16 (65.1) 3-1/8 (79.4)	N/A 1-9/16 (39.7)	7-7/8 (200.0) 6-3/16 (157.2)	3-15/16 (100.0) 3-1/8 (79.4)
5/8 (15.9)	2-3/4 (69.9) 5-1/8 (130.2)		4-13/16 (122.2) 6-7/16 (163.5)	3-1/8 (79.4) 3-7/8 (98.4)	N/A 1-15/16 (49.2)	9-5/8 (244.5) 7-11/16 (195.3)	4-13/16 (122.2) 3-7/8 (98.4)
3/4 (19.1)	3-1/4 (82.6) 6-5/8 (168.3)		5-11/16 (144.5) 6-5/16 (160.3)	3-3/4 (95.3) 5 (127.0)	N/A 2-1/2 (63.5)	11-3/8 (288.9) 9-15/16 (252.4)	5-11/16 (144.5) 5 (127.0)
7/8 (22.2)	3-3/4 (95.3) 6-1/4 (158.8)		6-9/16 (166.7) 8-1/2 (215.9)	4-5/16 (109.5) 6-1/4 (158.8)	N/A 3-1/8 (79.4)	13-1/8 (333.4) 12-1/2 (317.5)	6-9/16 (166.7) 6-1/4 (158.8)
1 (25.4)	4-1/4 (108.0) 7-3/8 (187.3)		7-7/8 (200.0) 10-1/16 (255.6)	5-1/8 (130.2) 7-3/8 (187.3)	N/A 3-11/16 (93.7)	15-3/4 (400.1) 14-3/4 (374.7)	7-7/8 (200.0) 7-3/8 (187.3)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Recommended Edge and Spacing Distance Requirements for Tension Loads*

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .65 In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING AT WHICH THE LOAD FACTOR APPLIED = .70 In. (mm)
1/4 (6.4)	1-1/8 (28.6) 1-15/16 (49.2) 2-1/8 (54.0)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2 (50.8) 1-15/16 (49.2) 1-5/8 (41.3)	1 (25.4) 1 (25.4) 13/16 (20.6)	3-15/16 (100.0) 3-7/8 (98.4) 3-3/16 (81.0)	2 (50.8) 1-15/16 (49.2) 1-5/8 (41.3)
3/8 (9.5)	1-1/2 (38.1) 3 (76.2) 4 (101.6)		2-5/8 (66.7) 3 (76.2) 3 (76.2)	1-5/16 (33.3) 1-1/2 (38.1) 1-1/2 (38.1)	5-1/4 (133.4) 6 (152.4) 6 (152.4)	2-5/8 (66.7) 3 (76.2) 3 (76.2)
1/2 (12.7)	2-1/4 (57.2) 4-1/8 (104.8) 6 (152.4)		3-15/16 (100.0) 3-1/8 (79.4) 4-1/2 (114.3)	2 (50.8) 1-9/16 (39.7) 2-1/4 (57.2)	7-7/8 (200.0) 6-3/16 (157.2) 9 (228.6)	3-15/16 (100.0) 3-1/8 (79.4) 4-1/2 (114.3)
5/8 (15.9)	2-3/4 (69.9) 5-1/8 (130.2) 7-1/2 (190.5)		4-13/16 (122.2) 3-7/8 (98.4) 5-5/8 (142.9)	2-7/16 (61.9) 1-15/16 (49.2) 2-13/16 (71.4)	9-5/8 (244.5) 7-1/16 (195.3) 11-1/4 (285.8)	4-13/16 (122.2) 3-7/8 (98.4) 5-5/8 (142.9)
3/4 (19.1)	3-1/4 (82.6) 6-5/8 (168.3) 10 (254.0)		5-11/16 (144.5) 5 (127.0) 7-1/2 (190.5)	2-7/8 (73.0) 2-1/2 (63.5) 3-3/4 (95.3)	11-3/8 (288.9) 9-15/16 (252.4) 15 (381.0)	5-11/16 (144.5) 5 (127.0) 7-1/2 (190.5)
7/8 (22.2)	3-3/4 (95.3) 6-1/4 (158.8) 8 (203.2)		6-9/16 (166.7) 6-1/4 (158.8) 6 (152.4)	3-5/16 (84.1) 3-1/8 (79.4) 3 (76.2)	13-1/8 (333.4) 12-1/2 (317.5) 12 (304.8)	6-9/16 (166.7) 6-1/4 (158.8) 6 (152.4)
1 (25.4)	4-1/2 (114.3) 7-3/8 (187.3) 9-1/2 (241.3)		7-7/8 (200.0) 7-3/8 (187.3) 7-1/8 (181.0)	3-15/16 (100.0) 3-11/16 (93.7) 3-9/16 (90.5)	15-3/4 (400.1) 14-3/4 (374.7) 14-1/4 (362.0)	7-7/8 (200.0) 7-3/8 (187.3) 7-1/8 (181.0)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

Combined Tension and Shear Loading—for Trubolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load V_s = Applied shear load P_t = Allowable tension load V_t = Allowable shear load

Trubolt® Seismic Wedge Anchors



**2015 IBC
Compliant**

DESCRIPTION/SUGGESTED SPECIFICATIONS

Seismic Wedge Type Anchors—

Trubolt® Wedge anchors consist of a high-strength threaded stud body, expansion clip, nut and washer. Anchor bodies are made of plated carbon steel. The expansion clip consists of a split cylindrical ring with undercutting grooves.


The exposed end of the anchor is stamped to identify anchor length. Stampings should be preserved during installation for any subsequent embedment verification.

Use carbide tipped hammer drill bits made in accordance with ANSI B212.15-1994 to install anchors.

Anchors are tested to ACI 355.2 and ICC-ES AC193. Anchors are listed by the following agencies as required by the local building code: ICC-ES, and City of Los Angeles.

See Appendix C (pages 108-109) for performance values in accordance with 2015 IBC.

INSTALLATION STEPS



1. Select a carbide drill bit with a diameter equal to the anchor diameter. Drill hole to any depth exceeding the desired embedment. See chart for minimum recommended embedment.



2. Clean hole or continue drilling additional depth to accommodate drill fines



3. Assemble washer and nut, leaving top of stud exposed through nut. Drive anchor through material to be fastened until washer is flush to surface of material.



4. Expand anchor by tightening nut 3-5 turns past the hand tight position, or to the specified torque requirement.

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. # ESR-2427
-Category 1 performance rating
-2015 IBC Compliant
-Meets ACI 318 ductility requirements
-Tested in accordance with ACI 355.2 and ICC-ES AC193
-Listed for use in seismic zones A, B, C, D, E, & F
-3/8", 1/2", 5/8" and 3/4" diameter anchors listed in ESR-2427

City of Los Angeles - #RR25867
Florida Building Code

SELECTION CHART

Trubolt®
Seismic Wedge Anchors
Carbon Steel with Zinc Plating

Meets ASTM B633 SC1, Type III specifications for electroplating of 5um = .0002" thickness. This coating is well suited for non-corrosive environments.

PART NUMBER	THREAD LENGTH In. (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
CWS-3830	1-5/8 (41.3)	3/8" - 16	3 (76.2)	5/8 (15.9)	50/ 5.3	400/ 42
CWS-3836	2-3/8 (60.3)	3/8" - 16	3-3/4 (95.3)	1-3/8 (34.9)	50/ 5.9	300/ 35
CWS-3850	3-5/8 (92.1)	3/8" - 16	5 (127.0)	2-5/8 (66.7)	50/ 7.3	250/ 37
CWS-1236	2-1/8 (54.0)	1/2" - 13	3-3/4 (95.3)	3/4 (19.1)	25/ 5.7	150/ 34
CWS-1244	2-7/8 (73.0)	1/2" - 13	4-1/2 (114.3)	1-1/2 (38.1)	25/ 7.0	150/ 40
CWS-1254	3-7/8 (98.4)	1/2" - 13	5-1/2 (139.7)	2-1/2 (63.5)	25/ 8.0	150/ 49
CWS-1270	5-3/8 (136.5)	1/2" - 13	7 (177.8)	4 (101.6)	25/ 9.2	150/ 55
CWS-5850	3-3/16 (81.0)	5/8" - 11	5 (127.0)	1-1/8 (28.6)	10/ 4.7	100/ 48
CWS-5860	4-3/16 (106.4)	5/8" - 11	6 (152.4)	2-1/8 (54.0)	10/ 5.4	50/ 28
CWS-5870	5-3/16 (131.8)	5/8" - 11	7 (177.8)	3-1/8 (79.4)	10/ 6.2	30/ 19
CWS-5884	5-3/4 (146.0)	5/8" - 11	8-1/2 (215.9)	4-5/8 (117.5)	10/ 8.0	30/ 25
CWS-3454	3-5/8 (92.1)	3/4" - 10	5-1/2 (139.7)	1-1/2 (38.1)	50/ 7.6	30/ 38
CWS-3462	4-3/8 (111.1)	3/4" - 10	6-1/4 (158.8)	2-1/4 (57.2)	10/ 8.5	30/ 26
CWS-3470	5-1/8 (130.2)	3/4" - 10	7 (177.8)	3 (76.2)	10/ 9.0	30/ 27
CWS-3484	5-3/4 (146.0)	3/4" - 10	8-1/2 (215.9)	4-1/2 (114.3)	10/ 10.5	30/ 32
CWS-34100	5-3/4 (146.0)	3/4" - 10	10 (254.0)	6 (152.4)	10/ 11.9	30/ 36

LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR	CODE	LENGTH OF ANCHOR
A	1-1/2 < 2 (38.1 < 50.8)	K	6-1/2 < 7 (165.1 < 177.8)
B	2 < 2-1/2 (50.8 < 63.5)	L	7 < 7-1/2 (177.8 < 190.5)
C	2-1/2 < 3 (63.5 < 76.2)	M	7-1/2 < 8 (190.5 < 203.2)
D	3 < 3-1/2 (76.2 < 88.9)	N	8 < 8-1/2 (203.2 < 215.9)
E	3-1/2 < 4 (88.9 < 101.6)	O	8-1/2 < 9 (215.9 < 228.6)
F	4 < 4-1/2 (101.6 < 114.3)	P	9 < 9-1/2 (228.6 < 241.3)
G	4-1/2 < 5 (114.3 < 127.0)	Q	9-1/2 < 10 (241.3 < 254.0)
H	5 < 5-1/2 (127.0 < 139.7)	R	10 < 11 (254.0 < 279.4)
I	5-1/2 < 6 (139.7 < 152.4)	S	11 < 12 (279.4 < 304.8)
J	6 < 6-1/2 (152.4 < 165.1)	T	12 < 13 (304.8 < 330.2)

*Located on top of anchor for easy inspection.

Trubolt®+ 316 Stainless Steel



**2015 IBC
Compliant**

DESCRIPTION/SUGGESTED SPECIFICATIONS

Seismic Wedge Type Anchors—

The Trubolt+ Wedge Anchor consists of a high-strength threaded anchor body, expansion clip, hex nut and washer. The anchor body is cold-formed from AISI Type 316 stainless steel materials. The expansion clip is fabricated from Type 316 stainless steel materials. The expansion clip consists of a split cylindrical ring with under cutting grooves at the bottom end.


The exposed end of the anchor is stamped to identify anchor length. Stampings should be preserved during installation for any subsequent embedment verification.

Use carbide tipped hammer drill bits made in accordance with ANSI B212.15-1994 to install anchors.

Anchors are tested to ACI 355.2 and ICC-ES AC193. Anchors are listed by the following agencies as required by the local building code: ICC-ES, and City of Los Angeles.

See Appendix C (page 110) for performance values in accordance with 2015 IBC.

INSTALLATION STEPS



1. Select a carbide drill bit with a diameter equal to the anchor diameter. Drill hole to any depth exceeding the desired embedment. See chart for minimum recommended embedment.



2. Clean hole or continue drilling additional depth to accommodate drill fines.



3. Assemble washer and nut, leaving top of stud exposed through nut. Drive anchor through material to be fastened until washer is flush to surface of material.



4. Expand anchor by tightening nut 3-5 turns past the hand tight position, or to the specified torque requirement.

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. #ESR-2427

- Category 1 performance rating
- 2015 IBC Compliant
- Meets ACI 318 ductility requirements
- Tested in accordance with ACI 355.2 and ICC-ES AC193
- Listed for use in Seismic zones A, B, C, D, E & F
- 1/2" and 5/8" diameter anchors listed in ESR-2427

City of Los Angeles - #RR25867

LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR	CODE	LENGTH OF ANCHOR
A	1-1/2 < 2 (38.1 < 50.8)	K	6-1/2 < 7 (165.1 < 177.8)
B	2 < 2-1/2 (50.8 < 63.5)	L	7 < 7-1/2 (177.8 < 190.5)
C	2-1/2 < 3 (63.5 < 76.2)	M	7-1/2 < 8 (190.5 < 203.2)
D	3 < 3-1/2 (76.2 < 88.9)	N	8 < 8-1/2 (203.2 < 215.9)
E	3-1/2 < 4 (88.9 < 101.6)	O	8-1/2 < 9 (215.9 < 228.6)
F	4 < 4-1/2 (101.6 < 114.3)	P	9 < 9-1/2 (228.6 < 241.3)
G	4-1/2 < 5 (114.3 < 127.0)	Q	9-1/2 < 10 (241.3 < 254.0)
H	5 < 5-1/2 (127.0 < 139.7)	R	10 < 11 (254.0 < 279.4)
I	5-1/2 < 6 (139.7 < 152.4)	S	11 < 12 (279.4 < 304.8)
J	6 < 6-1/2 (152.4 < 165.1)	T	12 < 13 (304.8 < 330.2)

*Located on top of anchor for easy inspection.

SELECTION CHART

Trubolt®+
Seismic Wedge Anchors
316 Stainless Steel

Meets ASTM B633 SC1, Type III specifications for electroplating of 5um = .0002" thickness. This coating is well suited for non-corrosive environments.

PART NUMBER	THREAD LENGTH In (mm)	ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
CSWW-1236	2-1/8 (54.0)	1/2"-13	3-3/4 (95.3)	3/4 (19.1)	25/5.8	150/35
CSWW-1244	2-7/8 (73.0)	1/2"-13	4-1/2 (114.3)	1-1/2 (38.1)	25/6.6	150/40
CSWW-1254	3-7/8 (98.4)	1/2"-13	5-1/2 (139.7)	2-1/2 (63.5)	25/7.9	150/48
CSWW-1270	5-3/8 (136.5)	1/2"-13	7 (177.8)	4 (101.6)	25/9.5	150/57
CSWW-5842	2-7/16 (61.9)	5/8"-11	4-1/2 (114.3)	3/8 (9.5)	10/4.2	100/42
CSWW-5850	3-3/16 (81.0)	5/8"-11	5 (127.0)	1-1/8 (28.6)	10/4.8	100/48

Large Diameter Tapcon (LDT) Anchors

**Finished head,
Removable Anchor**



LDT

(3/8" & 1/2")

**(5/8" & 3/4")
Sawtooth™**

3/8" and 1/2" are available
with **EnvireX** coating

**Uses standard drill bits—
no special drill bits to
purchase or lose!**

DESCRIPTION/SUGGESTED SPECIFICATIONS

Self-threading Anchors —

SPECIFIED FOR ANCHORAGE INTO CONCRETE



**LDT
Self-threading
Anchor**

The LDT anchor is a high performance anchor that cuts its own threads into concrete.

Anchor bodies are made of hardened carbon steel and zinc plated, **Grade 5**.

The anchors shall have a finished hex washer head with anti-rotation serrations to prevent anchor back-out. The head of the anchor is stamped with a length identification code for easy inspection.

The anchor shall be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

ADVANTAGES

SAVE TIME

EASILY INSTALLED

- Installs in less than half the time of wedge anchors or adhesive anchors
- Simply drill a pilot hole and drive the LDT anchor by hand or impact

EASILY REMOVED

- No torching or grinding required to remove anchors

SAVE MONEY


LOWER DRILL BIT COSTS

- Use standard ANSI bits instead of proprietary bits
- Single piece design, no nut and washer to assemble

USE STANDARD ANSI BITS

- No special proprietary bits to purchase or lose
- Reduce chances for anchor failure due to incorrect bit usage

Sawtooth Threads™ diameters available on 5/8" and 3/4"

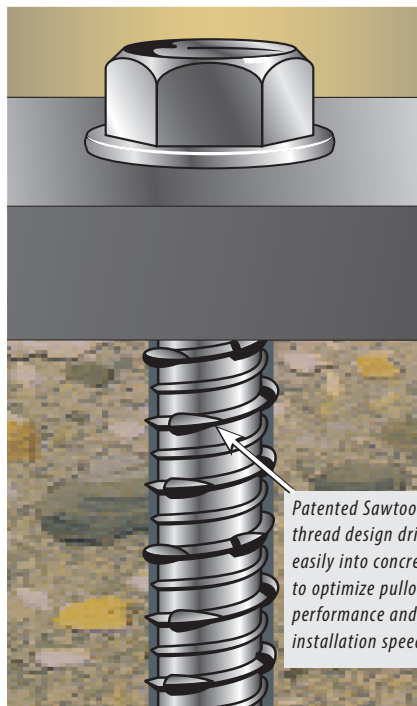

*Patented Sawtooth™
thread design drives
easily into concrete
to optimize pullout
performance and
installation speed*


IMPROVED PERFORMANCE IN LARGE DIAMETER HOLES

- Superior performance to wedge anchor
- Higher loads in shallow embedments
- Closer edge/spacing distance than mechanical anchors
- More threads for better thread engagement and higher pullout resistance
- Durable induction-hardened tip

EASY INSTALLATION

- Easy 2-step installation, simply drill a pilot hole and drive
- Installs in less than half the time of a wedge anchor
- Efficient thread cutting
- Use standard drill bit sizes
- Single piece design—no nut and washer assembly
- Easily removed

APPLICATIONS




Racking, shelving and conveyors are just a few high volume applications ideal for Large Diameter Tapcon (LDT™). The ease and speed of installation of the LDT can reduce installation time to less than half the time of typical systems used today.

For installation speed, high performance and easy removability, LDT is the anchor of choice.

The LDT's finished head and lack of exposed threads virtually eliminates tire damage on forklift trucks.

FEATURES

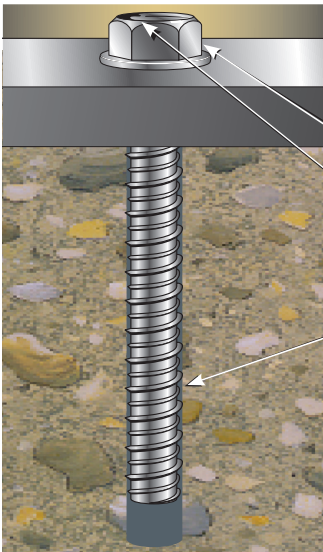

- Easy Installation**
Installs into concrete by hand or impact wrench
- Anti-rotation Serrated Washer**
— Prevents anchor back-out
- Extra Large Hex Washer Head**
— With increased bearing surface
- Length Identification Head Stamp**
— For embedment inspection after installation
- Hi-Lo Threads**
— Cuts its own threads into concrete for greater pull-out resistance

LDT 3/8" and 1/2" are available with EnvireX™ coating

1,000 hours salt spray ASTM B117. Approved for use in ACQ and MCQ Lumber*

*Excessive content of copper in the ACQ and MCQ Lumber may affect the anchor finish.


Selection Chart

LDT Size	ANSI Standard Drill Bit Diameter	A Anchor Head (Socket Size) Diameter	Washer Diameter	B Minimum Embedment	C Hole Depth	USE IN		
						Concrete	CMU	
							Hollow	Grout-filled
LDT 3/8"	5/16"	9/16"	13/16"	1-1/2"	2-1/2"	YES	YES	YES
LDT 1/2"	7/16"	3/4"	1"	2-1/2"	3-1/2"	YES	NO	YES
LDT 5/8"	1/2"	13/16"	1-3/16"	2-3/4"	3-3/4"	YES	NO	YES
LDT 3/4"	5/8"	15/16"	1-5/16"	3-1/4"	4-1/4"	YES	NO	YES


See page 75 for effective lengths and length indication code.

INSTALLATION STEPS

Installation Steps for Concrete, Lightweight Concrete and Metal Deck




1. Using the proper size carbide bit (see chart) drill "a pilot hole at least 1" deeper than anchor embedment."




2. Using an **electric impact wrench**, or socket wrench (hand install) insert anchor into hole and tighten anchor until fully seated. (see chart for socket size) (do not over tighten).

Installation Steps for Hollow or Grout-Filled CMU (3/8" and 1/2" diameter)



1. Using a 5/16" (for 3/8" LDT) or 7/16" (for 1/2" LDT) carbide tipped bit, drill a pilot hole at least 1" deeper than anchor embedment."



2. Using a socket wrench insert anchor into hole and hand tighten anchor until fully seated. (9/16" socket for 3/8" and 3/4" socket for 1/2") (do not over tighten).




LDT's can be installed by hand or with an impact wrench

Installation by hand—is easy, simply using a socket wrench



Installation by impact wrench—is recommended for faster installations or for high volume projects. Installation with impact wrench—is **not** recommended for hollow block.




SELECTION CHART

LDT Carbon and Stainless Steel

Carbon Steel with Zinc Plating: Meets ASTM B695 and B633 specifications for zinc plating of 5um = .0002" thickness. This coating is well suited for non-corrosive interior environments.

Carbon Steel with EnvireX Coating: Provides additional corrosion protection for outdoor applications.



PART NUMBER CARBON STEEL ZINC PLATED	PART NUMBER CARBON STEEL EnvireX COATING	PART NUMBER FOR 410 STAINLESS STEEL	ANCHOR DIA. In. (mm)	DRILL BIT DIA. In. (mm)	EFFECTIVE LENGTH In. (mm) (see detail on left)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
LDT-3816	---	SLDT-3816	3/8 (9.5)	5/16 (7.9)	1-3/4 (44.5)	1/4 (6.4)	50/ 3.0	400/ 24.0
LDT-3824	---	SLDT-3824	3/8 (9.5)	5/16 (7.9)	2-1/2 (63.5)	1 (25.4)	50/ 4.5	400/ 34.0
LDT-3830	LDT-3830 X	SLDT-3830	3/8 (9.5)	5/16 (7.9)	3 (76.2)	1-1/2 (38.1)	50/ 5.0	400/ 40.0
LDT-3840	LDT-3840 X	SLDT-3840	3/8 (9.5)	5/16 (7.9)	4 (101.6)	2-1/2 (63.5)	50/ 6.5	400/ 52.0
LDT-3850	---	SLDT-3850	3/8 (9.5)	5/16 (7.9)	5 (127.0)	3-1/2 (89.0)	40/ 7.5	320/ 60.0
LDT-1230	---	SLDT-1230	1/2 (12.7)	7/16 (11.1)	3 (76.2)	1/2 (12.7)	25/ 4.5	150/ 27.0
LDT-1240	LDT-1240 X	SLDT-1240	1/2 (12.7)	7/16 (11.1)	4 (101.6)	1-1/2 (38.1)	25/ 6.0	150/ 36.6
LDT-1250	LDT-1250 X	SLDT-1250	1/2 (12.7)	7/16 (11.1)	5 (127.0)	2-1/2 (63.5)	25/ 7.6	150/ 45.6
LDT-1260	---	---	1/2 (12.7)	7/16 (11.1)	6 (152.4)	4 (101.6)	20/ 9.0	120/ 54.0
LDT-5830	---	---	5/8 (15.9)	1/2 (12.7)	3 (76.2)	1/4 (6.4)	10/ 3.5	100/ 35.0
LDT-5840	---	---	5/8 (15.9)	1/2 (12.7)	4 (101.6)	1-1/4 (31.8)	10/ 4.0	100/ 40.0
LDT-5850	---	---	5/8 (15.9)	1/2 (12.7)	5 (127.0)	2-1/4 (57.1)	10/ 4.7	100/ 47.0
LDT-5860	---	---	5/8 (15.9)	1/2 (12.7)	6 (152.4)	3-1/4 (82.6)	10/ 5.4	50/ 27.0
LDT-3444	---	---	3/4 (19.1)	5/8 (15.9)	4-1/2 (114.3)	1-1/4 (31.8)	10/ 7.4	50/ 37.0
LDT-3454	---	---	3/4 (19.1)	5/8 (15.9)	5-1/2 (139.7)	2-1/4 (57.1)	10/ 8.1	50/ 40.5
LDT-3462	---	---	3/4 (19.1)	5/8 (15.9)	6-1/4 (158.8)	3 (76.2)	10/ 9.1	30/ 27.3

* The stainless steel LDT's will be gold in color in order to differentiate them from the carbon steel anchors.

DESIGN GUIDE

For proper selection of anchor diameters based upon predrilled holes in base plates and fixtures.

HOLE DIAMETER IN FIXTURE In. (mm)	SUGGESTED LDT DIAMETER In. (mm)
7/16 (11.1)	3/8 (9.5)
1/2 (12.7)	3/8 (9.5)
9/16 (14.3)	1/2 (12.7)
5/8 (15.9)	1/2 (12.7)
3/4 (19.1)	5/8 (15.9)
7/8 (22.2)	3/4 (19.1)

LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR In. (mm)
A	1-1/2 < 2 (38.1 < 50.8)
B	2 < 2-1/2 (50.8 < 63.5)
C	2-1/2 < 3 (63.5 < 76.2)
D	3 < 3-1/2 (76.2 < 88.9)
E	3-1/2 < 4 (88.9 < 101.6)
F	4 < 4-1/2 (101.6 < 114.3)
G	4-1/2 < 5 (114.3 < 127.0)
H	5 < 5-1/2 (127.0 < 139.7)
I	5-1/2 < 6 (139.7 < 152.4)
J	6 < 6-1/2 (152.4 < 165.1)

* Located on top of anchor for easy inspection.

PERFORMANCE TABLE

LDT Anchors Ultimate Tension and Shear Values (Lbs/kN) in Concrete

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	1,336 (5.9)	2,108 (9.4)	1,652 (7.3)	2,764 (12.3)	1,968 (8.8)	3,416 (15.2)
	2 (50.8)	1,492 (6.6)	3,036 (13.5)	2,024 (9.0)	3,228 (14.4)	2,552 (11.4)	3,420 (15.2)
	2-1/2 (63.5)	3,732 (16.6)	3,312 (14.7)	3,748 (16.7)	3,364 (15.0)	3,760 (16.7)	3,424 (15.2)
	3-1/2 (88.9)	5,396 (24.0)	3,312 (14.7)	6,624 (29.5)	3,368 (15.0)	7,852 (34.9)	3,428 (15.2)
1/2 (12.7)	2 (50.8)	3,580 (15.9)	5,644 (25.1)	3,908 (17.4)	6,512 (29.0)	4,236 (18.8)	7,380 (32.8)
	3-1/2 (88.9)	7,252 (32.3)	6,436 (28.6)	8,044 (35.8)	7,288 (32.4)	8,836 (39.3)	8,140 (36.2)
	4-1/2 (114.3)	10,176 (45.3)	7,384 (32.8)	10,332 (46.0)	7,968 (35.4)	10,488 (46.7)	8,552 (38.0)
5/8 (15.9)	2-3/4 (69.9)	5,276 (23.5)	8,656 (38.5)	6,560 (29.2)	11,064 (49.2)	7,844 (34.8)	13,476 (59.9)
	3-1/2 (88.9)	7,972 (35.5)	10,224 (45.5)	9,848 (43.8)	12,144 (54.0)	11,724 (52.2)	14,060 (62.5)
	4-1/2 (114.3)	11,568 (51.5)	12,316 (54.8)	13,432 (59.8)	13,580 (60.4)	16,892 (75.1)	14,840 (66.0)
3/4 (19.1)	3-1/4 (82.6)	6,876 (30.6)	7,140 (31.8)	9,756 (43.4)	10,728 (47.7)	12,636 (56.2)	14,316 (63.6)
	4-1/2 (114.3)	10,304 (45.8)	13,120 (58.4)	14,424 (64.2)	16,868 (75.0)	18,540 (82.5)	20,612 (91.7)
	5-1/2 (139.7)	13,048 (58.0)	17,908 (79.7)	18,156 (80.8)	21,718 (96.9)	23,268 (103.5)	25,652 (114.1)

PERFORMANCE TABLE

LDT Anchors

Allowable Tension and Shear Values* (Lbs/kN) in Concrete Carbon and Stainless Steel

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	334 (1.5)	527 (2.3)	413 (1.8)	691 (3.1)	492 (2.1)	854 (3.8)
	2 (50.8)	373 (1.7)	759 (3.4)	506 (2.2)	807 (3.6)	638 (2.8)	855 (3.8)
	2-1/2 (63.5)	933 (4.2)	828 (3.7)	937 (4.2)	841 (3.7)	940 (4.2)	856 (3.8)
	3-1/2 (88.9)	1,349 (6.0)	828 (3.7)	1,656 (7.4)	842 (3.7)	1,963 (8.7)	857 (3.8)
1/2 (12.7)	2 (50.8)	895 (4.0)	1,411 (6.3)	977 (4.3)	1,628 (7.2)	1,059 (4.7)	1,845 (8.2)
	3-1/2 (88.9)	1,813 (8.0)	1,609 (7.2)	2,011 (8.9)	1,822 (8.1)	2,209 (9.8)	2,035 (9.0)
	4-1/2 (114.3)	2,544 (11.3)	1,846 (8.2)	2,583 (11.5)	1,992 (8.9)	2,622 (11.7)	2,138 (9.5)
5/8 (15.9)	2-3/4 (69.9)	1,319 (5.9)	2,164 (9.7)	1,640 (7.3)	2,766 (12.3)	1,961 (8.7)	3,369 (15.0)
	3-1/2 (88.9)	1,993 (8.9)	2,556 (11.4)	2,462 (10.9)	3,036 (13.5)	2,931 (13.0)	3,515 (15.6)
	4-1/2 (114.3)	2,892 (12.9)	3,079 (13.7)	3,358 (14.9)	3,395 (15.1)	4,223 (18.8)	3,710 (16.5)
3/4 (19.1)	3-1/4 (82.6)	1,719 (7.6)	1,785 (7.9)	2,439 (10.8)	2,682 (11.9)	3,159 (14.0)	3,579 (15.9)
	4-1/2 (114.3)	2,576 (11.5)	3,280 (14.6)	3,606 (16.0)	4,217 (18.7)	4,635 (20.6)	5,153 (22.9)
	5-1/2 (139.7)	3,262 (14.5)	4,477 (19.9)	4,539 (20.2)	5,445 (24.2)	5,817 (25.9)	6,413 (28.5)

* Allowable values are based upon a 4 to 1 safety factor. (Ultimate/4)

PERFORMANCE TABLE

LDT Anchors

Recommended Edge & Spacing Requirements for Tension Loads* Carbon and Stainless Steel

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. EDGE DISTANCE 1-3/4 Inches (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3 Inches (76mm)
3/8 (9.5)	1-1/2 (38.1)	2 (50.8)	70%	6 (152.4)	44%
	2 (50.8)	2 (50.8)	70%	6 (152.4)	44%
	2-1/2 (63.5)	3 (76.2)	70%	6 (152.4)	44%
	3-1/2 (88.9)	4 (101.6)	70%	6 (152.4)	44%
1/2 (12.7)	2 (50.8)	2-1/4 (57.2)	65%	8 (203.2)	27%
	3-1/2 (88.9)	3 (76.2)	65%	8 (203.2)	27%
	4-1/2 (114.3)	4 (101.6)	65%	8 (203.2)	27%

* Edge and spacing distance shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

For 5/8" and 3/4" LDT Anchors, the critical edge distance for these anchors is 10 times the anchor diameter. The edge distance of these anchors may be reduced to 1-3/4" provided a 0.65 load factor is used for tension loads, a 0.15 load factor is used for shear loads applied perpendicular to the edge, or a 0.60 load factor is used for shear loads applied parallel to the edge. Linear interpolation may be used for intermediate edge distances.

PERFORMANCE TABLE

LDT Anchors

Recommended Edge & Spacing Requirements for Shear Loads* Carbon and Stainless Steel

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. EDGE DISTANCE 1-3/4 Inches (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3 Inches (76mm)
3/8 (9.5)	1-1/2 (38.1)	3 (76.2)	25%	6 (152.4)	57%
	2 (50.8)	4 (101.6)	25%	6 (152.4)	57%
	2-1/2 (63.5)	5 (127.0)	25%	6 (152.4)	57%
	3-1/2 (88.9)	5 (127.0)	25%	6 (152.4)	57%
1/2 (12.7)	2 (50.8)	5 (127.0)	25%	8 (203.2)	60%
	3-1/2 (88.9)	5 (127.0)	25%	8 (203.2)	60%
	4-1/2 (114.3)	5-1/2 (139.7)	25%	8 (203.2)	60%

* Edge and spacing distances shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLES

LDT Anchors

Ultimate Tension Load (Lbs/kN) in Concrete Block (anchors should be installed by hand in hollow block)


ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW CONCRETE BLOCK		GROUT FILLED CONCRETE BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	916 (4.1)	3,176 (14.1)	1,592 (7.1)	3,900 (17.3)
1/2 (12.7)	2-1/2 (63.5)	N/A	N/A	5,924 (26.4)	6,680 (29.7)

LDT Anchors

Allowable Tension and Shear* (Lbs/kN) in Concrete Block (anchors should be installed by hand in hollow block)

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW CONCRETE BLOCK		GROUT FILLED CONCRETE BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	229 (1.0)	794 (3.5)	398 (1.8)	975 (4.3)
1/2 (12.7)	2-1/2 (63.5)	N/A	N/A	1,481 (6.6)	1,670 (7.4)

* Allowable values are based upon a 4 to 1 safety factor. (Ultimate/4)



LDT Anchors

Anchoring Overhead in 3000 PSI Lightweight Concrete On Metal Deck

ANCHOR	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	3000PSI (20.7 MPa) CONCRETE	
			ULTIMATE TENSION LOAD Lbs. (kN)	ALLOWABLE WORKING LOAD Lbs. (kN)
3/8" LDT	5/16 (7.9)	1-1/2 (38.1)	Upper Flute	722 (3.2)
			Lower Flute	465 (2.1)

For use in concrete and concrete block

1/2" LDT	1/2" adhesive	5/8" wedge
INSTALLS IN 1/2 THE TIME	DIFFICULT TO REMOVE	PERMANENT APPLICATION
EASILY REMOVED	EXPOSED THREADS	EXPOSED THREADS
FINISHED HEAD	5-STEP INSTALLATION	DIFFICULT TO REMOVE
	CURE TIME	

7/16" DRILL BIT

4-1/2"

9/16" DRILL BIT

4-1/2"

5/8" DRILL BIT

7"

DRILL BIT SIZE REQUIRED:
LDT anchors specify a smaller & less expensive drill bit than those required with the 1/2" adhesive threaded rod or the 5/8" wedge.

HOLE DEPTH REQUIRED:
At 4-1/2" embedment the LDT anchor will give you performance (2000 PSI concrete) similar to 1/2" adhesive anchor of the same depth or 5/8" wedge anchors at 7" deep. (2000 PSI concrete)

Boa[™] Coil Expansion Anchors



DESCRIPTION/SUGGESTED SPECIFICATIONS

SPECIFIED FOR ANCHORAGE INTO CONCRETE


The Boa[™] Coil is a high performance expansion anchor providing through fixture fastening and easy removal to keep the job moving. It's reusable with the coil replacement anchors making this anchor a low cost solution. Ideal combination of value, performance and reusability make the Boa Coil the choice for Forming and tilt-wall contractors.

ADVANTAGES: Easy installation, removable, reusable, high shear strength, **Grade 5 bolt.**

APPLICATIONS: Concrete formwork, load bearing angles, beams and columns, machinery holddown, Jersey barrier, glare screens, light rail/commuter work.

INSTALLATION STEPS

NOTE: To achieve maximum loads the installation process needs to be carried out as follows:

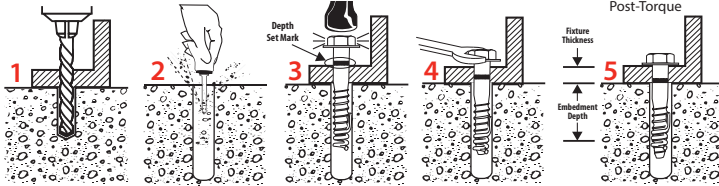

1. Using the fixture as a template, drill the correct diameter and depth hole.
 2. Remove debris with vacuum or hand pump.
 3. Insert the assembled Boa Coil anchor. (The coil anchor tab points up the anchor.) Tap anchor down to depth set mark and stop.
 4. Tighten until washer is firmly held to the fixture and stop. Number of turns to set anchor: 1/2" 3-4 turns, 5/8" and 3/4" 4-5 turns. Ensure washer is tight and snug fit.
 5. The anchor is ready to take load. (The bolt can be removed leaving the coil in the hole.)
- The Boa coil anchor can be reused up to 3 times in new holes.

SELECTION CHART

Boa Coil Anchors

PART NO.	ANCHOR DIA In. (mm)	SOCKET SIZE In.	DRILL BIT DIA. In. (mm)	HOLE DEPTH In. (mm)	FIXTURE THICKNESS AT MINIMUM EMBEDMENT TO BE FASTENED In. (mm)	QTY/WT PER BOX Lbs.	QTY/WT PER MASTER CTN Lbs.
RHCA-1230	1/2 (12.7)	3/4	1/2 (12.7)	3-1/2 (88.9)	3/8 (9.5)	25 / 4.5	150 / 27.2
RHCA-1240	1/2 (12.7)	3/4	1/2 (12.7)	4-1/2 (114.3)	1-3/8 (35.0)	25 / 5.9	150 / 35.6
RHCA-1254	1/2 (12.7)	3/4	1/2 (12.7)	6 (152.4)	2-7/8 (73.0)	25 / 7.8	150 / 46.9
RHCA-5834	5/8 (15.9)	15/16	5/8 (15.9)	4 (101.6)	3/8 (9.5)	20 / 8.8	120 / 52.5
RHCA-5850	5/8 (15.9)	15/16	5/8 (15.9)	5-1/2 (139.7)	1-7/8 (47.6)	15 / 8.5	90 / 51.0
RHCA-3444	3/4 (19.1)	1-1/8	3/4 (19.1)	5 (127.00)	1/4 (6.4)	10 / 6.4	60 / 38.3
RHCA-3460	3/4 (19.1)	1-1/8	3/4 (19.1)	6-1/2 (165.1)	1-3/4 (44.5)	10 / 8.2	60 / 49.1



Replacement coil available for easy re-use with Red Head Boa Coil Anchors only.

COIL REPLACEMENT PART NO.	QTY/WT PER BOX Lbs.	QTY/WT PER MASTER CTN Lbs.
RHC-12 (1/2")	100 / 2.8	600/16.9
RHC-58 (5/8")	100 / 2.2	600/13.1
RHC-34 (3/4")	100 / 1.3	600/7.5

PERFORMANCE TABLES

Boa Coil Anchors

Ultimate concrete/steel capacity in concrete¹

ANCHOR DIAMETER In. (mm)	HOLE DIA. In. (mm)	EFFECTIVE EMBEDMENT DEPTH In. (mm)	FIXTURE HOLE DIA. In. (mm)	TURNS TO SET ANCHOR	ULTIMATE CONCRETE CAPACITY (2) (3)						ULTIMATE STEEL STRENGTH (4)	
					2,000 PSI (13.8 MPa)		4,000 PSI (27.6 MPa)		6,000 PSI (41.4 MPa)		LBS. (kN)	
					TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/2 (12.7)	1/2 (12.7)	2 (50.8)	9/16 (14.3)	3-4	4,039 (17.9)	6,070 (27.0)	5,715 (25.4)	8,590 (38.2)	6,994 (31.1)	10,516 (46.8)	19,384 (86.2)	14,456 (64.3)
		3 (76.2)	9/16 (14.3)	3-4	7,403 (32.9)	12,082 (53.7)	10,471 (46.6)	17,089 (76.0)	12,822 (57.0)	20,937 (93.1)		
5/8 (15.9)	5/8 (15.9)	2-3/8 (60.3)	11/16 (17.5)	4-5	5,291 (23.5)	8,800 (39.1)	7,483 (33.3)	12,445 (55.4)	9,162 (40.8)	15,242 (67.8)	30,152 (134.1)	21,937 (97.6)
		3-7/8 (98.4)	11/16 (17.5)	4-5	10,855 (48.3)	19,999 (89.0)	15,355 (68.3)	28,285 (125.8)	18,802 (83.6)	34,636 (154.0)		
3/4 (19.1)	3/4 (19.1)	3-1/4 (82.6)	13/16 (20.6)	4-5	8,479 (37.7)	16,567 (73.7)	11,991 (53.3)	23,427 (104.2)	14,682 (65.3)	28,690 (127.6)	43,360 (192.9)	32,031 (142.5)
		4-1/2 (114.3)	13/16 (20.6)	4-5	13,555 (60.3)	27,239 (121.2)	19,171 (85.3)	38,518 (171.3)	23,478 (104.4)	47,173 (209.8)		

(1) Use lower value of either concrete or steel (2) Concrete capacity based on Concrete Capacity Design method and verified by test data (3) Influence factors must be applied to concrete strength values (4) Steel strength based on .57 Fu Ag for shear and 0.75 Fu Ag for tension (5) Test results when reused four times; maximum 20% reduction in tensile capacity; no reduction in shear

Boa Coil Anchors

Allowable concrete/steel capacity in concrete¹

ANCHOR DIAMETER In. (mm)	HOLE DIA. In. (mm)	EFFECTIVE EMBEDMENT DEPTH In. (mm)	FIXTURE HOLE DIA. In. (mm)	TURNS TO SET ANCHOR	RECOMMENDED WORKING LOADS IN CONCRETE (2) (3)						ALLOWABLE STEEL STRENGTH (4)	
					2,000 PSI (13.8 MPa)		4,000 PSI (27.6 MPa)		6,000 PSI (41.4 MPa)		LBS. (kN)	
					TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/2 (12.7)	1/2 (12.7)	2 (50.8)	9/16 (14.3)	3-4	1,011 (4.5)	1,517 (6.7)	1,430 (6.4)	2,147 (9.5)	1,751 (7.8)	2,629 (11.7)	8,529 (37.9)	5,579 (24.8)
		3 (76.2)	9/16 (14.3)	3-4	1,852 (8.2)	3,020 (13.4)	2,619 (11.6)	4,272 (19.0)	3,208 (14.3)	5,234 (23.3)		
5/8 (15.9)	5/8 (15.9)	2-3/8 (60.3)	11/16 (17.5)	4-5	1,324 (5.9)	2,200 (9.8)	1,872 (8.3)	3,111 (13.8)	2,293 (10.2)	3,810 (16.9)	13,266 (59.0)	8,466 (37.7)
		3-7/8 (98.4)	11/16 (17.5)	4-5	2,715 (12.1)	5,000 (22.2)	3,840 (17.1)	7,071 (31.5)	4,703 (20.9)	8,660 (38.5)		
3/4 (19.1)	3/4 (19.1)	3-1/4 (82.6)	13/16 (20.6)	4-5	2,121 (9.4)	4,141 (18.4)	2,999 (13.3)	5,556 (24.7)	3,673 (16.3)	7,172 (31.9)	19,078 (84.9)	12,362 (55.0)
		4-1/2 (114.3)	13/16 (20.6)	4-5	3,390 (15.1)	6,810 (30.3)	4,794 (21.3)	9,630 (42.8)	5,872 (26.2)	11,793 (52.4)		

(1) Use lower value of either concrete or steel (2) Safety factor 4 (3) Influence factors must be applied to concrete strength values (4) Steel strength based on .22 Fu Ag for shear and 0.33 Fu Ag for tension (5) Test results when reused four times; maximum 20% reduction in tensile capacity; no reduction in shear

Multi-Set II® Drop-In Anchors


**Internally
Threaded Heavy-
Duty Anchoring
Systems**

DESCRIPTION/SUGGESTED SPECIFICATIONS

Drop-In, Shell-Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE

Drop-In, shell-type anchors feature an internally threaded, all-steel shell with expansion cone insert and flush embedment lip. Anchors are manufactured from zinc-plated carbon steel, 18-8 stainless steel and 316 stainless steel.



Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994 specifications.

Anchors should be tested to ASTM E488 criteria and listed by ICC-ES. Anchors should also be listed by the following agencies as required by the local building code: UL, FM, City of Los Angeles, California State Fire Marshal and Caltrans.


ADVANTAGES

Depth Charge Stop Drill and RX Drop-In Anchors

Ideal for Hollow-Core, Pre-Cast Plank and Post Tension Slabs



- Optimized for use in hollow-core, pre-cast plank and post-tension slabs
- Lip keeps anchor flush during installation
- Shallow drilling—fast installation

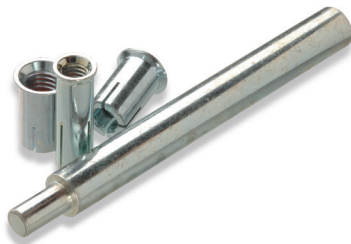

RX Drop-In
Anchor



See page 81 for kits



RM Drop-In Anchor



- Lipped anchor body keeps anchor flush
- Easy installation
- Keeps all rods same length
- Easy inspection
- Available in carbon steel, 18-8 and 316 stainless steel

RL Drop-In Anchor




- Below surface setting for easy patch work

Coil Thread Anchor




- Quick thread attachment—ideal for 1 sided forming
- Use coil rod on job
- 2 diameters (1/2" and 3/4")


APPLICATIONS



Pumps and heavy piping are common applications for larger diameter Multi-Set Drop-In Anchors.




Cable tray and strut suspended from concrete ceilings are ideal Multi-Set applications. In post-tension or hollow-core slabs use the RX-38.



The Multi-Set Anchor is the standard for pipe-hanging. The RM version has a retainer lip to keep all anchors flush at the surface, keeping all your threaded rod the same length.

FEATURES

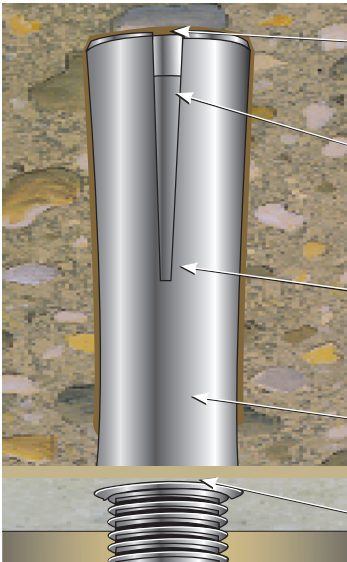

Expander Slots—allow for easy setting and superior performance

Cone Insert—that expands the anchor when driven with setting tool and hammer

Body—available in zinc-plated steel, 18-8 stainless steel, and 316 stainless steel

Easy Depth Inspection—keeps threaded rod drop lengths consistent

Retainer Lip—to keep anchor flush with surface

For use with threaded rods or headed bolts (supplied by contractor)

SELECTION CHART

Multi-Set II Depth Charge Bits

PART NUMBER	DESCRIPTION FEATURE BENEFITS	DRILLING DEPTH
DCX-138	3/8" Depth Charge Stop Drill	3/4"
DCX-112	1/2" Depth Charge Stop Drill	1"

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-55614 Type 1 (Formerly GSA: FF-S-325 Group VIII)


Underwriters Laboratories

Factory Mutual

Caltrans


For the most current approvals/listings visit: www.itw-redhead.com

INSTALLATION STEPS




To set anchor flush with surface:


1. Drill hole to required embedment (see Table on page 69).



2. Clean hole with pressurized air.



3. Drive anchor flush with surface of concrete.



4. Expand anchor with setting tool provided (see chart on page 69). Anchor is properly expanded when shoulder of setting tool is flush with top of anchor.



■ Shoulder prevents over drilling. Less likely to hit reinforcing steel or post-tension cable in concrete



■ No wasted time or energy drilling deeper than necessary
■ Prevents anchor from dropping too far into hole below work surface


SELECTION CHARTS

Multi-Set II Drop-In Anchors

PART NUMBER RT-138
1 setting tool per master carton
(See above for part numbers.)

PART NUMBER RTX-138
For use with RX-38 only.

PART NUMBER RTX-112
For use with RX-12 only.

USER TYPE / APPLICATION	BASE MATERIAL	CORROSION RESISTANCE LEVEL	DROP-IN ANCHOR TYPE	PART NUMBER	SETTING TOOL PART NUMBER*	BOLT SIZE-THREADS PER INCH	DRILL BIT DIA. In. (mm)	THREAD DEPTH In. (mm)	EMBEDMENT MIN. HOLE DEPTH In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CTN lbs.*
	Solid concrete/lightweight fill deck	Low	RM	RM-14	RT-114	1/4" - 20	3/8 (9.5)	3/8 (9.5)	1 (25.4)	100/ 2.6	1000/ 28
				RM-38	RT-138	3/8" - 16	1/2 (12.7)	1/2 (12.7)	1-5/8 (41.3)	50/ 3.4	500/ 36
				RM-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)	50/ 5.8	400/ 49
				RM-58	RT-158	5/8" - 11	7/8 (22.2)	1 (25.4)	2-1/2 (63.5)	25/ 7.8	125/ 41
				RM-34	RT-134	3/4" - 10	1 (25.4)	1-1/4 (31.8)	3-3/16 (81.0)	25/11.9	100/ 49
	Hollow-core pre-cast or Post-tension	Low	RX	RX-38	RTX-138	3/8" - 16	1/2 (12.7)	3/8 (9.5)	3/4 (19.1)	100/ 3.5	1000/ 36
				RX-12	RTX-112	1/2" - 13	5/8 (15.9)	1/2 (12.7)	1 (25.4)	50/ 3.0	500/ 31
	Solid concrete/lightweight fill deck	Medium	SRM** 18-8 S.S.	SRM-14	RT-114	1/4" - 20	3/8 (9.5)	3/8 (9.5)	1 (25.4)	100/ 2.7	1000/ 28
				SRM-38	RT-138	3/8" - 16	1/2 (12.7)	1/2 (12.7)	1-5/8 (41.3)	50/ 3.4	500/ 36
				SRM-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)	50/ 6.0	400/ 50
				SRM-58	RT-158	5/8" - 11	7/8 (22.2)	1 (25.4)	2-1/2 (63.5)	25/ 7.9	125/ 42
	Solid concrete	High	SSRM** 316 S.S.	SSRM-38	RT-138	3/8" - 16	1/2 (12.7)	1/2 (12.7)	1-5/8 (41.3)	50/ 3.4	500/ 36
				SSRM-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)	50/ 6.0	400/ 50
Concrete Contractor, General Contractor, Highway	Solid concrete	Low	CL-Coil Threaded	CL-12	RT-112	1/2" - 6	5/8 (15.9)	3/4 (19.1)	2 (50.8)	50/ 5.7	400/ 47
				CL-34	RT-134	3/4" - 4.5	1 (25.4)	1-1/4 (31.8)	3-3/16 (81.0)	25/11.9	100/ 49
Concrete Cutting/ Sawing Contractor/ Misc. Metal	Solid concrete/lightweight fill deck	Low	RL (w/o lip)	RL-14	RT-114	1/4" - 20	3/8 (9.5)	3/8 (9.5)	1 (25.4)	100/ 2.6	1000/ 28
				RL-38	RT-138	3/8" - 16	1/2 (12.7)	1/2 (12.7)	1-5/8 (41.3)	50/ 3.4	500/ 36
				RL-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)	50/ 5.8	400/ 49
				RL-58	RT-158	5/8" - 11	7/8 (22.2)	1 (25.4)	2-1/2 (63.5)	25/ 7.8	125/ 41
				RL-34	RT-134	3/4" - 10	1 (25.4)	1-1/4 (31.8)	3-3/16 (81.0)	25/11.9	100/ 49

* 1 setting tool per master carton.

** For continuous extreme low temperature, use stainless steel.

Multi-Set II RX Drop-In Kits

Part No.	Description
RX-38	3/8" drop-in using 1/2" drill bit
RTX-138	Setting Tool
DCX-138	Depth Charge Stop Drill
RX-38KIT	Contains: 1,000 RX-38 Anchors, 5 RTX-138 Setting Tools and 2 DCX-138 Depth Charge Stop Drills

Part No.	Description
RX-12	1/2" drop-in using 5/8" drill bit
RTX-112	Setting Tool
DCX-112	Depth Charge Stop Drill

PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Concrete*

BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	TENSION Lbs. (kN)			SHEAR Lbs. (kN)
				$f'_c = 2000 \text{ PSI}$ (13.8 MPa)	$f'_c = 4000 \text{ PSI}$ (27.6 MPa)	$f'_c = 6000 \text{ PSI}$ (41.4 MPa)	$f'_c > 2000 \text{ PSI}$ (13.8 MPa)
1/4 (6.4)	3/8 (9.5)	1 (25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	1,680 (7.5)	2,360 (10.5)	2,980 (13.3)	1,080 (4.8)
3/8 (9.5)	1/2 (12.7)	1-5/8 (41.3)		2,980 (13.3)	3,800 (16.9)	6,240 (27.8)	3,160 (14.1)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		3,300 (14.7)	5,840 (26.0)	8,300 (36.9)	4,580 (20.4)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		5,500 (24.5)	8,640 (38.4)	11,020 (49.0)	7,440 (33.1)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		8,280 (36.8)	9,480 (42.2)	12,260 (54.5)	10,480 (46.6)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

* For continuous extreme low temperature applications, use stainless steel.

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Lightweight Concrete*

BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	LIGHTWEIGHT CONCRETE $f'_c = 3000 \text{ PSI}$ (20.7 MPa)		LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL $f'_c = 3000 \text{ PSI}$ (20.7 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1/2 (12.7)	1-5/8 (39.7)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	2,035 (9.1)	1,895 (8.4)	3,340 (14.9)	4,420 (19.6)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		2,740 (12.2)	2,750 (12.2)	3,200 (14.2)	4,940 (22.0)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		4,240 (18.9)	4,465 (19.9)	5,960 (26.5)	5,840 (26.0)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		5,330 (23.7)	6,290 (28.0)	8,180 (36.4)	9,120 (40.6)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Multi-Set II Drop-In Anchors

Recommended Edge and Spacing Distance Requirements*

BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. EDGE DISTANCE AT WHICH LOAD FACTOR APPLIED =.80 FOR TENSION =.70 FOR SHEAR In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING BETWEEN ANCHORS LOAD FACTOR APPLIED =.80 FOR TENSION =.55 FOR SHEAR In. (mm)
1/4 (6.4)	3/8 (9.5)	1 (25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	1-3/4 (44.5)	7/8 (22.2)	3-1/2 (88.9)	1-3/4 (44.5)
3/8 (9.5)	1/2 (12.7)	1-5/8 (41.3)		2-7/8 (73.0)	1-7/16 (36.5)	5-11/16 (144.5)	2-7/8 (73.0)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		3-1/2 (88.9)	1-3/4 (44.5)	7 (177.8)	3-1/2 (88.9)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		4-3/8 (111.1)	2-3/16 (55.6)	8-3/4 (222.3)	4-3/8 (111.1)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		5-5/8 (142.9)	2-13/16 (71.4)	11-3/16 (284.2)	5-5/8 (142.9)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLES

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) for RX-series (3/4" and 1" Embedment)*


BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	EMBEDMENT In. (mm)	2500 PSI (17.2 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE		HOLLOW CORE	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1/2 (12.7)	3/4 (19.1)	1,571 (7.0)	2,295 (10.2)	1,987 (8.8)	2,903 (12.9)	1,908 (8.5)	2,401 (10.7)
1/2 (12.7)	5/8 (15.9)	1 (25.4)	2,113 (9.4)	2,585 (11.5)	2,673 (11.9)	3,270 (14.5)	2,462 (11.0)	2,401 (10.7)

* The tabulated values are for RX anchors installed at a minimum of 12 diameters on center and minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameters spacing and 3 diameter edge distance provided the values are reduced 50 percent. Linear Interpolation may be used for intermediate spacings and edge margins.

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Multi-Set II Drop-In Anchors

Anchoring Overhead in 3000 PSI Lightweight Concrete On Metal Deck

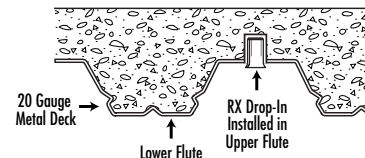

ANCHOR	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	3000PSI (20.7 MPa) CONCRETE		
			ULTIMATE TENSION LOAD Lbs. (kN)		ALLOWABLE WORKING LOAD Lbs. (kN)
RX-38 Drop-In	1/2 (12.7)	3/4 (19.1)	Upper Flute	1,410 (6.3)	353 (1.6)
			Lower Flute	1,206 (5.4)	301 (1.3)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Combined Tension and Shear Loading—for Multi-Set Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load

V_s = Applied shear load

P_t = Allowable tension load

V_t = Allowable shear load

Dynabolt® Sleeve Anchors

**Versatile,
Medium-Duty
Sleeve Anchor**



**Dynabolt
Hex Nut Sleeve Anchor**

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-1922A
(Formerly GSA: FF-S-325 Group II, Type 3, Class 3)
Factory Mutual

DESCRIPTION/SUGGESTED SPECIFICATIONS

Sleeve Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE, GROUT-FILLED CONCRETE BLOCK, HOLLOW CONCRETE BLOCK AND BRICK



**Dynabolt
Masonry
Sleeve
Anchor**

Sleeve type anchors feature a split expansion sleeve over a threaded stud bolt body and integral expander, nut and washer.

Anchors are made of Plated Carbon Steel, or Type 18-8 Stainless Steel.

Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.


Anchors are tested to ASTM E488 criteria.

ADVANTAGES


- Anchor diameter equals hole diameter
- Available in hex head and three other head styles
- Available 1/4 - 3/4" diameter up to 6-1/4" length
- Zinc plated carbon steel and 304 stainless steel
- Provides full 360° hole contact over large area and reduces concrete stress
- Heavy-loading capacity
- Preassembled for faster, easier installations
- Dynabolt can be installed through object to be fastened
- Sleeve design improves holding power
- No pre-spotting of holes necessary

Available Head Styles


Full range of head style, corrosion protection, and sizes makes the Dynabolt Sleeve the right product for almost any application.

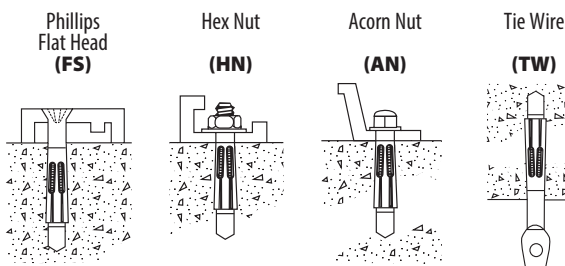


INSTALLATION STEPS



1. Use a carbide tipped drill bit whose diameter is equal to the anchor. See Chart to determine proper size bit for anchor used. Drill hole to any depth exceeding minimum embedment. Clean hole.



2. Insert assembled anchor through fixture and into hole so that washer or head is flush with materials to be fastened.



3. Expand anchor by tightening nut or head 2 to 3 turns.


APPLICATIONS



Electrical junction boxes are common applications for the Dynabolt Sleeve anchor because it works well in solid concrete, concrete block, and brick. It is also available in several finished head styles.



The Dynabolt Sleeve anchor works well in hollow materials like brick and block. It is available in zinc-plated carbon steel and 304 stainless steel.



Door and window frames are commonly attached to the structure with Dynabolt Sleeve anchors because of their finished & threshold head styles and performance in block & brick.

SELECTION CHART

Dynabolt

Carbon Steel with Zinc Plating




Typical Applications—
Shelf ledgers, electrical boxes,
conduit

Environment—Interior
(non-corrosive)

Level of Corrosion—Low

* Effective Anchor Length

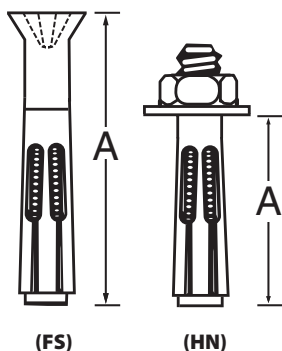

HEAD STYLE	PART NUMBER	ANCHOR DIA. & DRILL BIT SIZE	EFFECTIVE ANCHOR LENGTH* In. (mm)	BOLT DIA./ THREADS PER INCH	MIN. EMBEDMENT In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
ACORN NUT	AN-1405	1/4"	5/8 (15.9)	3/16" /24	1/2 (12.7)	1/8 (3.2)	100/ 1.9	1000/ 20
	AN-1413		1-3/8 (34.9)	3/16" /24	1-1/8 (28.6)	1/4 (6.4)	100/ 2.6	1000/ 27
	AN-1422		2-1/4 (57.2)	3/16" /24	1-1/8 (28.6)	1-1/8 (28.6)	100/ 3.7	1000/ 38
HEX NUT	HN-1413	1/4"	1-3/8 (34.9)	3/16" /24	1-1/8 (28.6)	1/4 (6.4)	100/ 2.3	1000/ 24
	HN-1422		2-1/4 (57.2)	3/16" /24	1-1/8 (28.6)	1-1/8 (28.6)	100/ 3.4	1000/ 35
	HN-1614	5/16"	1-1/2 (38.1)	1/4" /20	1-1/4 (31.8)	1/4 (6.4)	100/ 4.0	1000/ 41
	HN-1624		2-1/2 (63.5)	1/4" /20	1-1/4 (31.8)	1-1/4 (31.8)	100/ 5.9	800/ 47
	HN-3817	3/8"	1-7/8 (47.6)	5/16" /18	1-1/2 (38.1)	3/8 (9.5)	50/ 3.5	500/ 36
	HN-3830		3 (76.2)	5/16" /18	1-1/2 (38.1)	1-1/2 (38.1)	50/ 4.9	400/ 40
	HN-1222	1/2"	2-1/4 (57.2)	3/8" /16	1-7/8 (47.6)	3/8 (9.5)	25/ 3.3	250/ 34
	HN-1230		3 (76.2)	3/8" /16	1-7/8 (47.6)	1-1/8 (28.6)	25/ 4.0	200/ 33
	HN-1240		4 (101.6)	3/8" /16	1-7/8 (47.6)	2-1/8 (54.0)	25/ 5.3	200/ 44
	HN-5830	5/8"	3 (76.2)	1/2" /13	2 (50.8)	1 (25.4)	25/ 7.0	150/ 46
	HN-5842		4-1/4 (108.0)	1/2" /13	2 (50.8)	2-1/4 (57.2)	10/ 3.9	100/ 41
	HN-3424	3/4"	2-1/2 (63.5)	5/8" /11	2-1/4 (57.2)	1/4 (6.4)	10/ 4.7	50/ 25
	HN-3440		4 (101.6)	5/8" /11	2-1/4 (57.2)	1-3/4 (44.5)	5/ 3.2	50/ 33
PHILLIPS FLAT HEAD*	FS-3826	3/8" (head dia. .722)	2-7/8 (73.0)	5/16" /18	1-1/2 (38.1)	1-3/8 (34.9)	50/ 3.8	500/ 40
	FS-3840		4 (101.6)	5/16" /18	1-1/2 (38.1)	2-1/2 (63.5)	50/ 5.3	400/ 44
	FS-3850		5 (127.0)	5/16" /18	1-1/2 (38.1)	3-1/2 (88.9)	50/ 5.6	300/ 40
	FS-3860		6 (152.4)	5/16" /18	1-1/2 (38.1)	4-1/2 (114.3)	50/ 8.0	300/ 48
TIE WIRE	TW-1614	5/16"	1-1/2 (38.1)	1/4" /20	1-1/2 (38.1)	9/32 hole (7.1)	100/ 4.9	1000/ 50

* Phillips flat head uses a standard 80°–82° counter sink.

SELECTION CHART

Dynabolt

Type 304 Stainless Steel



Typical Applications—
Cladding and Brick Ties

Environment—Slight to
moderate degree of pollution

Level of Corrosion—
Medium

HEAD STYLE	PART NUMBER	ANCHOR DIA. & DRILL BIT SIZE	EFFECTIVE ANCHOR LENGTH* In. (mm)	BOLT DIA./ THREADS PER INCH	MIN. EMBEDMENT In. (mm)	MAX. THICKNESS OF MATERIAL TO BE FASTENED In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CARTON lbs.
HEX NUT	SHN-3817	3/8"	1-7/8 (47.6)	5/16" /18	1-1/2 (38.1)	3/8 (9.5)	50/ 3.5	500/ 36
	SHN-3830		3 (76.2)	5/16" /18	1-1/2 (38.1)	1-1/2 (38.1)	50/ 4.9	400/ 40
	SHN-1222	1/2"	2-1/4 (57.2)	3/8" /16	1-7/8 (47.6)	3/8 (9.5)	25/ 3.3	250/ 34
	SHN-1230		3 (76.2)	3/8" /16	1-7/8 (47.6)	1-1/8 (28.6)	25/ 4.0	200/ 33
	SHN-1240		4 (101.6)	3/8" /16	1-7/8 (47.6)	2-1/8 (54.0)	25/ 5.3	200/ 44
PHILLIPS FLAT HEAD*	SHN-5842	5/8"	4-1/4 (108.0)	1/2" /13	2 (50.8)	2-1/4 (57.2)	10/ 3.9	100/ 41
	SFS-1430	1/4"	3-1/8 (79.4)	3/16" /24	1-1/8 (28.6)	2 (50.8)	100/ 3.8	1000/ 38
	SFS-3826	3/8"	2-7/8 (73.0)	5/16" /18	1-1/2 (38.1)	1-3/8 (34.9)	50/ 3.8	500/ 40
	SFS-3840		4 (101.6)	5/16" /18	1-1/2 (38.1)	2-1/2 (63.5)	50/ 5.3	400/ 44

* Flat head uses a standard 80°–82° counter sink.

For continuous extreme low temperature applications, use stainless steel.

PERFORMANCE TABLES

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Concrete (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon or Stainless	1,200 (5.3)	1,215 (5.4)	1,325 (5.9)	1,215 (5.4)	1,450 (6.4)	1,215 (5.4)
5/16 (7.9)	8 (10.8)	1/4 (6.4)	1-1/4 (31.8)		1,400 (6.2)	2,040 (9.1)	1,920 (8.5)	2,220 (9.9)	2,600 (11.6)	2,400 (10.7)
3/8 (9.5)	14 (19.0)	5/16 (7.9)	1-1/2 (38.1)		1,620 (7.2)	2,560 (11.4)	2,240 (10.0)	2,800 (12.5)	3,100 (13.8)	3,040 (13.5)
1/2 (12.7)	20 (27.1)	3/8 (9.5)	1-7/8 (47.6)		2,220 (9.9)	3,250 (14.5)	3,140 (14.0)	4,000 (17.8)	4,400 (19.6)	4,500 (20.0)
5/8 (15.9)	48 (65.1)	1/2 (12.7)	2 (50.8)		3,080 (13.7)	6,440 (28.6)	4,400 (19.6)	7,240 (32.2)	6,120 (27.2)	8,080 (35.9)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/4 (57.2)		4,200 (18.7)	10,200 (45.4)	6,060 (27.0)	11,600 (51.6)	8,900 (39.6)	13,100 (58.3)

* For continuous extreme low temperature applications, use stainless steel.

For AN-1405, Ultimate Pullout: 500 lbs. & Ultimate Shear: 1751 lbs. based on 4,000 psi.

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Lightweight Concrete (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	f'c = 4000 PSI (27.6 MPa)		f'c = 6000 PSI (41.4 MPa)	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon or Stainless	870 (3.9)	730 (3.2)	1,066 (4.7)	894 (4.0)
5/16 (7.9)	8 (10.8)	1/4 (6.4)	1-1/4 (31.8)		1,260 (5.6)	1,680 (7.5)	1,440 (6.4)	2,220 (9.9)
3/8 (9.5)	14 (19.0)	5/16 (7.9)	1-1/2 (38.1)		1,620 (7.2)	2,300 (10.2)	2,240 (10.0)	2,800 (12.5)
1/2 (12.7)	25 (33.9)	3/8 (9.5)	1-7/8 (47.6)		2,600 (11.6)	2,400 (10.7)	3,160 (14.1)	2,400 (10.7)
5/8 (15.9)	48 (65.1)	1/2 (12.7)	2 (50.8)		3,240 (14.4)	5,600 (24.9)	4,300 (19.1)	7,840 (34.9)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/4 (57.2)		3,640 (16.2)	8,640 (38.4)	5,800 (25.8)	12,480 (55.5)

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Concrete Masonry Units (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	LIGHTWEIGHT				MEDIUM WEIGHT			
					HOLLOW CORE		GROUT FILLED		HOLLOW CORE		GROUT FILLED	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon Stainless	1,120 (5.0) 640 (2.8)	1,215 (5.4) 1,620 (7.2)	1,120 (5.0) 640 (2.8)	1,215 (5.4) 1,620 (7.2)	1,120 (5.0) 640 (2.8)	1,215 (5.4) 1,620 (7.2)	1,120 (5.0) 640 (2.8)	1,215 (5.4) 1,620 (7.2)
3/8 (9.5)	15 (20.3)	5/16 (7.9)	1-1/2 (38.1)	Carbon Stainless	1,360 (6.0) 1,160 (5.2)	2,560 (11.4) 2,560 (11.4)	1,360 (6.0) 1,160 (5.2)	2,560 (11.4) 2,560 (11.4)	1,360 (6.0) 1,160 (5.2)	2,560 (11.4) 2,560 (11.4)	1,360 (6.0) 1,160 (5.2)	2,560 (11.4) 2,560 (11.4)
1/2 (12.7)	25 (33.9)	3/8 (9.5)	1-7/8 (47.6)	Carbon Stainless	N/A N/A	N/A N/A	2,220 (9.9) 2,100 (9.3)	3,500 (15.6) 3,500 (15.6)	N/A N/A	N/A N/A	2,220 (9.9) 2,100 (9.3)	3,500 (15.6) 3,500 (15.6)
5/8 (15.9)	55 (74.6)	1/2 (12.7)	2 (50.8)	Carbon Stainless	N/A N/A	N/A N/A	3,080 (13.7) 3,080 (13.7)	6,440 (28.6) 6,440 (28.6)	N/A N/A	N/A N/A	3,080 (13.7) 2,820 (12.5)	6,440 (28.6) 6,440 (28.6)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/2 (63.5)	Carbon	N/A	N/A	4,200 (18.7)	10,200 (45.4)	N/A	N/A	4,200 (18.7)	10,200 (45.4)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values. The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameter spacing and 3 diameter edge distance, provided the values are reduced 50 percent. Linear interpolation may be used for intermediate spacings and edge distances.

Combined Tension and Shear Loading—for Dynabolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t) + (V_s/V_t) \leq 1$$

P_s = Applied tension load

V_s = Applied shear load

P_t = Allowable tension load

V_t = Allowable shear load

Tapcon® Concrete and Masonry Anchors

THE ORIGINAL
Tapcon®



Blue Climaseal™

410 Stainless Steel

DESCRIPTION/SUGGESTED SPECIFICATIONS

Tapcon Anchors —

SPECIFIED FOR ANCHORAGE INTO CONCRETE, BRICK OR BLOCK



The “original masonry” anchor that cuts its own threads into concrete, brick, or block. Maximum performance is achieved because the Tapcon Anchor, the Condrive Installation Tool, and the carbide-tipped Tapcon Drill Bits are designed to work as a system. It is essential to use the Condrive tool and the correct drill bit to assure consistent anchor performance.

ADVANTAGES

- Works in all masonry base materials.
- Fast and easy—3 anchors per minute.
- No hole spotting or inserts required.
- Removable.
- Slotted hex and phillips flat head styles.
- Extended corrosion protection—Blue Climaseal™.
- Available in 410 Stainless Steel.

Tapcon Anchors



Blue Climaseal™ provides extended corrosion protection

Available in 410 Stainless Steel
(see photo on left)

Hex Head style on Tapcon Anchors is available for majority of fixture anchoring needs

Phillips Flat Head style is available when flush seating is necessary in countersink applications

Advanced Threadform cuts into concrete and masonry for reduced installation torque and increased pullout performance

Lengths of Tapcon Anchors range from 1-1/4" to 4" in 3/16" and up to 6" in 1/4" diameters.

Nail-Type Point guides the anchor into the pre-drilled hole. Excellent for wood to concrete applications

Tapcon® is a registered trademark of Buildex, a division of Illinois Tool Works, Inc.

CORROSION RESISTANCE

Kesternich Results (DIN 40018 2.0L)

30 Cycles - 10% or less rust


Salt Spray Results (ASTM B117)

720 Hrs - 10% or less rust

APPLICATIONS



The Tapcon Anchor is especially well suited for window and door frames because it performs well in block, is available in a flat head style, and is fast to install.




Many horizontal or "wall" applications are attached with Tapcon Anchor because it is removable and works well in block and brick.



The picture shows the Condrive 1000 Installation Kit in action. The kit makes for fast and easy change over from drill bit to driver and controls the driving torque to prevent thread stripping and head snapping in hard base materials.

FEATURES

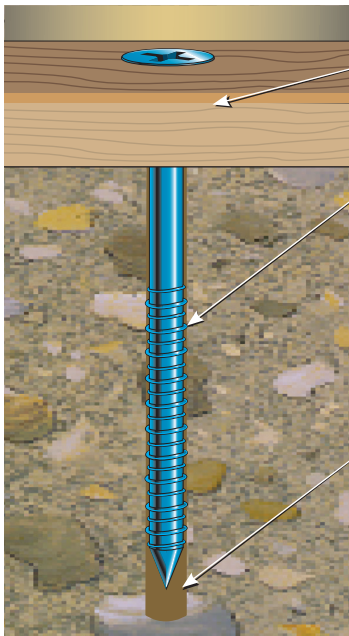

Fixture Thickness—determine the fixture thickness to be anchored

Anchor Embedment—with a minimum recommended embedment of 1", the correct Tapcon anchor choice can be made. Hole depth must be a minimum **1/4" deeper** than the anchor embedment to allow for displaced material

Hole Diameter—proper hole diameter is very important to insure consistent performance and maximum pullout strength. **3/16" anchors require 5/32" diameter bits, and 1/4" anchors require 3/16" diameter bits**

APPROVAL/LISTINGS

Blue Climaseal™

ICC Evaluation Service, Inc. – ESR-1671
ICC Evaluation Service, Inc. – ESR-2202
Miami-Dade County – NOA #12-0816.06
Florida Building Code

410 Stainless Steel

Miami-Dade County – NOA #12-0816.06
Florida Building Code

For the most current approvals/listings visit: www.itw-redhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING: If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. **Select proper fastener – diameter / head style / length.**
 - a) Use selection chart to choose proper length.
2. **Drill Hole – use selection chart to determine drill bit length and depth of hole.**
 - a) Choose appropriate drill of Tapcon Anchor.
 - b) Drill hole minimum **1/4" deeper** than Tapcon Anchor to be embedded.
Minimum anchor embedment: 1"
Maximum anchor embedment: 1-3/4"
3. **Drive Anchor.**



WARNING: Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING: Using the wrong size drill bit will affect performance values and may cause failure.

Head Styles

3/16" diameter has a 1/4" slotted hex washer head (HWH)
1/4" diameter has a 5/16" slotted hex washer head (HWH)



3/16" diameter uses a #2 phillips flat head (PFH)
1/4" diameter uses a #3 phillips flat head (PFH)



SELECTION CHARTS

Tapcon® Anchors with Blue Climaseal™

Diameter.....3/16" and 1/4"

Point Type.....Nail

All boxes of Tapcon anchors come packaged with matching carbide-tipped bit. Tapcon is packaged 100 pieces per box and 500 pieces per master carton except 3205407 and 3203407 (400 in master carton).

Thread Form.....Advanced Threadform Technology™

Finish.....Blue Climaseal™

FIXTURE THICKNESS INCHES	RECOMMENDED TAPCON LENGTH In. (mm)	PART NO. 3/16" HEX HEAD	PART NO. 1/4" HEX HEAD	PART NO. 3/16" FLAT HEAD	PART NO. 1/4" FLAT HEAD	BIT LENGTH In. (mm)	STRAIGHT SHANK BITS FOR 3/16" TAPCON PART NO.	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
0" – 1/4"	1-1/4 (31.8)	3139407	3153407	3169407	3183407	3-1/2 (88.9)	3095910	3098910
1/4" – 3/4"	1-3/4 (44.5)	3141407	3155407	3171407	3185407	3-1/2 (88.9)	3095910	3098910
3/4" – 1-1/4"	2-1/4 (57.2)	3143407	3157407	3173407	3187407	4-1/2 (114.3)	3096910	3099910
1-1/4" – 1-3/4"	2-3/4 (69.9)	3145407	3159407	3175407	3189407	4-1/2 (114.3)	3096910	3099910
1-3/4" – 2-1/4"	3-1/4 (82.6)	3147407	3161407	3177407	3191407	5-1/2 (139.7)	3097910	3100910
2-1/4" – 2-3/4"	3-3/4 (95.3)	3149407	3163407	3179407	3193407	5-1/2 (139.7)	3097910	3100910
2-1/2" – 3"	4 (101.6)	N/A	3165407	3181407	3195407	5-1/2 (139.7)	3097910	3100910
3-1/2" – 4"	5 (127.0)	N/A	3167407	N/A	3197407	6-1/2 (165.1)	N/A	3102910
4-1/2" – 5"	6 (152.4)	N/A	3205407	N/A	3203407	7-1/2 (190.5)	N/A	3206910

Additional Tapcon bits are available 10 per tube.

Tapcon® 410 SS Anchor

Diameter.....3/16" and 1/4"

Point Type.....Nail

All boxes of Tapcon anchors come packaged with matching carbide-tipped bit. Tapcon is packaged 100 pieces per box and 500 pieces per master carton except 3461907 (400 in master carton).

Thread Form.....Original Notched Hi-Lo™

Finish.....410 Stainless Steel with Silver Climaseal™

FIXTURE THICKNESS INCHES	RECOMMENDED TAPCON LENGTH In. (mm)	PART NO. 1/4" HEX HEAD	PART NO. 3/16" FLAT HEAD	PART NO. 1/4" FLAT HEAD	BIT LENGTH In. (mm)	STRAIGHT SHANK BITS FOR 3/16" TAPCON PART NO.	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
0" – 1/4"	1-1/4 (31.8)	3367907	3434907	3373907	3-1/2 (88.9)	3095910	3098910
1/4" – 3/4"	1-3/4 (44.5)	3368907	3418907	3374907	3-1/2 (88.9)	3095910	3098910
3/4" – 1-1/4"	2-1/4 (57.2)	3369907	3419907	3375907	4-1/2 (114.3)	3096910	3099910
1-1/4" – 1-3/4"	2-3/4 (69.9)	3370907	3420907	3376907	4-1/2 (114.3)	3096910	3099910
1-3/4" – 2-1/4"	3-1/4 (82.6)	3371907	3421907	3377907	5-1/2 (139.7)	3097910	3100910
2-1/4" – 2-3/4"	3-3/4 (95.3)	3372907	3422907	3378907	5-1/2 (139.7)	3097910	3100910
2-1/2" – 3"	4 (101.6)	3459907	N/A	N/A	5-1/2 (139.7)	N/A	3100910
3-1/2" – 4"	5 (127.0)	3460907	N/A	N/A	6-1/2 (165.1)	N/A	3102910
4-1/2" – 5"	6 (152.4)	N/A	N/A	N/A	7-1/2 (190.5)	N/A	3461907

Tapcon® SDS Bits

PART NUMBER	DESCRIPTION
3311910	7" (SDS Rotomhammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotomhammer Bits for use with 1/4" Tapcon)
3101910	7" (SDS Rotomhammer Bits for use with 1/4" Tapcon)

All SDS bits are sold individually.

PERFORMANCE TABLE

Tapcon® Anchors

Ultimate Tension and Shear Values (Lbs./kN) in Concrete

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 5000 PSI (34.5 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/16 (4.8)	1 (25.4)	600 (2.7)	720 (3.2)	625 (2.8)	720 (3.2)	650 (2.9)	720 (3.2)	800 (3.6)	860 (3.8)
	1-1/4 (31.8)	845 (3.7)	720 (3.2)	858 (3.8)	720 (3.2)	870 (3.9)	720 (3.2)	1,010 (4.5)	860 (3.8)
	1-1/2 (38.1)	1,090 (4.8)	860 (3.8)	1,090 (4.8)	860 (3.8)	1,090 (4.8)	860 (3.8)	1,220 (5.4)	860 (3.8)
	1-3/4 (44.5)	1,450 (6.5)	870 (3.9)	1,455 (6.5)	870 (3.9)	1,460 (6.5)	990 (4.4)	1,730 (7.7)	990 (4.4)
1/4 (6.4)	1 (25.4)	750 (3.3)	900 (4.0)	775 (3.4)	900 (4.0)	800 (3.6)	1,360 (6.1)	950 (4.2)	1,440 (6.4)
	1-1/4 (31.8)	1,050 (4.7)	900 (4.0)	1,160 (5.2)	900 (4.0)	1,270 (5.6)	1,360 (6.1)	1,515 (6.7)	1,440 (6.4)
	1-1/2 (38.1)	1,380 (6.1)	1,200 (5.3)	1,600 (7.2)	1,200 (5.3)	1,820 (8.1)	1,380 (6.1)	2,170 (9.7)	1,670 (7.4)
	1-3/4 (44.5)	2,020 (9.0)	1,670 (7.4)	2,200 (9.8)	1,670 (7.4)	2,380 (10.6)	1,670 (7.4)	2,770 (12.3)	1,670 (7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

PERFORMANCE TABLES

Tapcon® Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Hollow Block

ANCHOR DIA. In. (mm)	ANCHOR EMBEDMENT In. (mm)	LIGHTWEIGHT BLOCK		MEDIUM WEIGHT BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/16 (4.8)	1 (25.4)	220 (1.0)	400 (1.8)	340 (1.5)	730 (3.2)
1/4 (6.4)	1 (25.4)	250 (1.1)	620 (2.8)	500 (2.2)	1,000 (4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

Tapcon® Anchors

Allowable Edge and Spacing Distances

PARAMETER	ANCHOR DIA. In. (mm)	NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
		FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	3/16	3	1-1/2	0.73	3	1-1/2	1.00
	1/4	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	3/16	3	1-1/2	0.83	3	1-1/2	1.00
	1/4	4	2	0.82	4	2	0.81
Edge Distance - Tension	3/16	1-7/8	1	0.83	4	2	0.91
	1/4	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance -Shear	3/16	2-1/4	1-1/8	0.70	4	2	0.93
	1/4	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm

Tapcon® Condrive 1000 Tool Kit

DESCRIPTION/SUGGESTED SPECIFICATIONS

Condrive 1000 Installation Tool— SPECIFIED FOR ANCHORAGE INTO CONCRETE, BRICK OR BLOCK

The key to Tapcon's fast and easy installation is the multi-purpose Condrive Installation Tool. The drive sleeve, along with the hex head and phillips sockets provide the installer with the flexibility necessary for the complete variety of Tapcon applications (tool does not include drill bit).

Condrive® 1000 - A multi-purpose tool designed for installation of Tapcon hex head and Phillips flat head anchors up to 3-3/4" long. If driving hex head Tapcon, driver will automatically disengage. The Condrive 1000 has a reusable plastic case.

Condrive Tools are designed to specifically install Tapcon Anchors and to fit standard hammer drills.

APPLICATIONS




The picture shows the Condrive 1000 Installation Kit in action. The kit makes for fast and easy change over from drill bit to driver and controls the driving torque to prevent thread stripping and head snapping in hard base materials.

ADVANTAGES

- Fast change from drilling to driving
- Eliminates need to change out chucks and bits
- Eliminates need for two tools
- Special nut driver is recessed for torque control to reduce head breakage

Condrive 1000 Spare Parts

PART NO.	DESCRIPTION	QTY/WT
(A) 7901001	Drill Adapter	1/.06
(B) 7901002	Sleeve	1/.01
(C) 7901006	3/16" Socket	1/.04
(D) 7901007	1/4" Socket	1/.05
(E) 7901010	Phillips Socket	1/.44

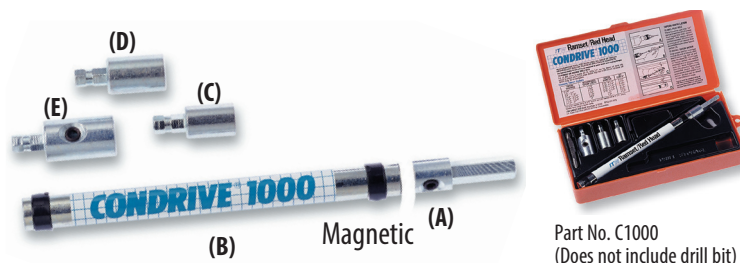

Part No. C1000
(Does not include drill bit)

Tapcon® Maxi-Set Anchors



White UltraShield UltraShield

APPLICATIONS




Shutters - protective and decorative
Screened porch and pool enclosures.
Various sheet metal flashings.



Decorative wrought iron.
Wood nailers and plywood attachment.

DESCRIPTION/SUGGESTED SPECIFICATIONS

FORTAPCON APPLICATIONS THAT REQUIRE MORE ANCHOR BEARING SURFACE.



ADVANTAGES

- Same reliable performance and speed of installation as regular Tapcon.
- Compatible with DrivTru™ socket system. Improves installation. Protects paint finish.
- Large 5/8" diameter flange provides more bearing surface and increases pullover resistance. High 5/16" hex head adds driving stability.
- UltraShield™ and White UltraShield™ long-life finish deliver excellent corrosion resistance.

CORROSION RESISTANCE

Salt Spray Test (ASTM B117)	UltraShield	White UltraShield
	1100 Hrs 10% or less rust	1500 Hrs NO RED RUST

APPROVAL/LISTINGS

ICC Evaluation Service, Inc. – #ESR-1671
Miami-Dade County – NOA #12-0816.06

For the most current approvals/listings visit: www.itw-redhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

- Select proper fastener – diameter / head style / length.
 - Use selection chart to choose proper length.
- Drill Hole – use selection chart to determine drill bit length and depth of hole.
 - Choose appropriate drill of Tapcon Anchor.
 - Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded.
Minimum anchor embedment: 1"
Maximum anchor embedment: 1-3/4"
- Drive anchor using DrivTru HWH Socket.



DrivTru PART#	DESCRIPTION	APPLICATIONS
1513910	DrivTru Socket	All 5/16" across flats HWH fasteners



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

Tapcon® Maxi-Set Anchors		Diameter.....1/4" Thread Form..... Advanced Threadform Technology™ Point Type.....Nail Finish.....UltraShield™ or *White UltraShield™ Head Style.....5/16" across flats hex with 5/8" diameter flange.		
RECOMMENDED TAPCON LENGTH In. (mm)	PART NO. 1/4" HEX HEAD	FINISH	BIT LENGTH In. (mm)	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
1-3/4 (44.5)	3294000	Ultra Shield	3-1/2 (88.9)	3098910
2-1/4 (57.2)	3295000	Ultra Shield	4-1/2 (114.3)	3099910
1-3/4 (44.5)	3383100	White Ultra Shield	3-1/2 (88.9)	3098910
2-1/4 (57.2)	3384100	White Ultra Shield	4-1/2 (114.3)	3099910
2-3/4 (69.9)	3408100	White Ultra Shield	4-1/2 (114.3)	3099910
3-1/4 (82.6)	3409100	White Ultra Shield	5-1/2 (139.7)	3100910

NOTE: 2-3/4" and 3-1/4" lengths are special orders. Contact customer service for lead-times.

Maxi-Sets are packed 1,000 pieces per master carton except 3409100 is packed 750 pieces.

Tapcon® SDS Bits	
PART NUMBER	DESCRIPTION
3311910	7" (SDS Rotohammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotohammer Bits for use with 1/4" Tapcon)
3101910	7" (SDS Rotohammer Bits for use with 1/4" Tapcon)

PERFORMANCE TABLES

Tapcon® Anchors		Ultimate Tension and Shear Values (Lbs/kN) in Concrete							
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 5000 PSI (34.5 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	750 (3.3)	900 (4.0)	775 (3.4)	900 (4.0)	800 (3.6)	1,360 (6.1)	950 (4.2)	1,440 (6.4)
	1-1/4 (31.8)	1,050 (4.7)	900 (4.0)	1,160 (5.2)	900 (4.0)	1,270 (5.6)	1,360 (6.1)	1,515 (6.7)	1,440 (6.4)
	1-1/2 (38.1)	1,380 (6.1)	1,200 (5.3)	1,600 (7.2)	1,200 (5.3)	1,820 (8.1)	1,380 (6.1)	2,170 (9.7)	1,670 (7.4)
	1-3/4 (44.5)	2,020 (9.0)	1,670 (7.4)	2,200 (9.8)	1,670 (7.4)	2,380 (10.6)	1,670 (7.4)	2,770 (12.3)	1,670 (7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

Tapcon® Anchors		Ultimate Tension and Shear Values (Lbs/kN) in Hollow Block			
ANCHOR DIA. In. (mm)	ANCHOR EMBEDMENT In. (mm)	LIGHTWEIGHT BLOCK		MEDIUM WEIGHT BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	250 (1.1)	620 (2.8)	500 (2.2)	1,000 (4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

Tapcon® Anchors		Allowable Edge and Spacing Distances					
PARAMETER	ANCHOR DIA. In. (mm)	NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
		FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	1/4	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	1/4	4	2	0.82	4	2	0.81
Edge Distance - Tension	1/4	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	1/4	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm

Tapcon® SCOTS Anchors



APPLICATIONS




Shutters - protective and decorative



Screened porch and pool enclosures

Aluminum fixtures

Railings




Metal roofing

Flexible flashings

DESCRIPTION/SUGGESTED SPECIFICATIONS

PREMIUM CONCRETE ANCHOR THAT COMBINES THE CORROSION PROTECTION OF STAINLESS STEEL WITH THE PERFORMANCE OF TAPCON ANCHORS.



ADVANTAGES

- 300 Series Stainless Steel head and Carbon Steel body.
- Integral washer design provides more bearing surface.
- Rubber EPDM sealing washer "locks-out" moisture from building interior.
- Head paint available in white or bronze (extra charge).
- Delivers the same holding performance as Tapcon anchors with Blue Climaseal™.
- Reduces replacement of "weathered" fasteners.

CORROSION RESISTANCE

Kesternich Results (DIN 50018, 2.0L)

Climaseal™

30 Cycles - 10% or less red rust

APPROVAL/LISTINGS

ICC Evaluation Service, Inc. – ESR-1671

Miami-Dade County – #12-0816.06

For the most current approvals/listings visit: www.itw-redhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. Select proper fastener – diameter / head style / length.
 - a) Use selection chart to choose proper length.
2. Drill Hole – use selection chart to determine drill bit length and depth of hole.
 - a) Choose appropriate drill of Tapcon Anchor.
 - b) Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded
 - Minimum anchor embedment: 1"
 - Maximum anchor embedment: 1-3/4"
3. Drive anchor using DrivTru HWH Socket.



DrivTru PART#	DESCRIPTION	APPLICATIONS
1513910	DrivTru Socket	All 5/16" across flats HWH fasteners



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

Tapcon® SCOTS Anchors		Diameter.....1/4"	Thread Form..... Advanced Threadform Technology™
		Point Type.....Nail	Finish.....Silver Climaseal™
		Head Style.....5/16" HWH (300 Series Stainless)	
RECOMMENDED TAPCON LENGTH In. (mm)	PART NO. 1/4" HEX HEAD	BIT LENGTH In. (mm)	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
1-3/4 (44.5)	3358407	3-1/2 (88.9)	3098910
2-1/4 (57.2)	3359407	4-1/2 (114.3)	3099910

NOTE: 2-3/4" and 3-1/4" lengths are special orders. Contact customer service for lead-times.
SCOTS are packed 1,000 pieces per master, 100 pieces per inner.

Tapcon® SDS Bits	
PART NUMBER	DESCRIPTION
3311910	7" (SDS Rotohammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotohammer Bits for use with 1/4" Tapcon)
3101910	7" (SDS Rotohammer Bits for use with 1/4" Tapcon)

PERFORMANCE TABLES

Tapcon® Anchors		Ultimate Tension and Shear Values (Lbs/kN) in Concrete							
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 5000 PSI (34.5 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	750 (3.3)	900 (4.0)	775 (3.4)	900 (4.0)	800 (3.6)	1,360 (6.1)	950 (4.2)	1,440 (6.4)
	1-1/4 (31.8)	1,050 (4.7)	900 (4.0)	1,160 (5.2)	900 (4.0)	1,270 (5.6)	1,360 (6.1)	1,515 (6.7)	1,440 (6.4)
	1-1/2 (38.1)	1,380 (6.1)	1,200 (5.3)	1,600 (7.2)	1,200 (5.3)	1,820 (8.1)	1,380 (6.1)	2,170 (9.7)	1,670 (7.4)
	1-3/4 (44.5)	2,020 (9.0)	1,670 (7.4)	2,200 (9.8)	1,670 (7.4)	2,380 (10.6)	1,670 (7.4)	2,770 (12.3)	1,670 (7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

Tapcon® Anchors		Ultimate Tension and Shear Values (Lbs/kN) in Hollow Concrete Masonry Units			
ANCHOR DIA. In. (mm)	ANCHOR EMBEDMENT In. (mm)	LIGHTWEIGHT BLOCK		MEDIUM WEIGHT BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	250 (1.1)	620 (2.8)	500 (2.2)	1,000 (4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

Tapcon® Anchors		Allowable Edge and Spacing Distances					
------------------------	--	---	--	--	--	--	--

PARAMETER	ANCHOR DIA. In. (mm)	NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
		FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	1/4	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	1/4	4	2	0.82	4	2	0.81
Edge Distance - Tension	1/4	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	1/4	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm

Tapcon® XL Anchors



UltraShield White UltraShield

APPLICATIONS



Shutters - protective and decorative



Screened porch and pool enclosures.

Railings

Mounted electrical equipment



Sill plates

DESCRIPTION/SUGGESTED SPECIFICATIONS

EXTRA LARGE TAPCON FOR EXTRA LARGE CHALLENGES!

ADVANTAGES

- Internal TORX® T-40 drive assures easy installation.
- High button head resists cam-out during installation.
- Corrosion protection of UltraShield™ and White UltraShield™ to combat aggressive environments.
- Available in silver or white to complement standard fixtures.
- Delivers over 3,000 lbs. holding power in concrete.
- Alternative to sleeve anchors.
- 1/4" SDS Tapcon drill bit for added convenience.
- Condrive® XL with MegaGrip™ bit holder for rapid one-tool installation.

CORROSION RESISTANCE

Salt Spray Test (ASTM B117)	UltraShield	White UltraShield
	1100 Hrs 10% or less rust	1500 Hrs no red rust

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. **Select proper fastener – diameter / head style / length.**
 - a) Use selection chart to choose proper length.
2. **Drill Hole – use selection chart to determine drill bit length and depth of hole.**
 - a) Choose appropriate drill of Tapcon Anchor.
 - b) Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded.

Minimum anchor embedment: 1"

Maximum anchor embedment: 1-3/4"
3. **Insert the adjustable MegaGrip bit tip holder in the small opening of sleeve. Slide the open end of the Condrive XL Installation Tool sleeve over the drill bit and snap in place.**
4. **Drive anchor using MegaGrip adjustable magnetic bit holder with TORX T-40 bit tip**



MegaGrip PART#	DESCRIPTION
3400910	MegaGrip Bit Holder



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

<div><div>Tapcon®</div><div>XL Anchors</div></div>		Diameter.....5/16"	Thread Form..... Reverse Hi-Lo®	
		Point Type.....Nail	Finish.....UltraShield™ or *White UltraShield™	
		Head Style.....High button with TORX T-40 Drive		
RECOMMENDED TAPCON LENGTH In. (mm)	PART NO.	FINISH	BIT LENGTH In. (mm)	1/4" DRILL BITS FOR TAPCON XL PART NO.
2-1/4 (57.2)	3395902	Ultra Shield	6-3/4" SDS drill bit with hex	3394910
2-1/4 (57.2)	3397902	White Ultra Shield	6-3/4" SDS drill bit with hex	3394910
2-3/4 (69.9)	3398902	White Ultra Shield	6-3/4" SDS drill bit with hex	3394910

XLs are packed 100 pieces per master carton.

PART NO.	DESCRIPTION	CARTON QTY
3401910	Condrive® XL Installation Tool with MegaGrip™ Bit Holder with TORX® T-40 Bit Tip	10 per master carton
3400910	MegaGrip™ Magnetized Bit Holder with TORX T-40 Bit Tip	10 per bag
3394910	1/4" x 6-3/4" SDS Tapcon Drill Bit with Hex	1 piece per tube

Tapcon XL Anchors must be installed using all Red Head system components (Tapcon XL Anchors, Condrive XL Installation Tool and Tapcon Drill Bits) in order to qualify for ITW Red Head system support.

PERFORMANCE TABLES

Tapcon® XL Anchors		Ultimate Tension and Shear Values (Lbs/kN) in Concrete		
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	f'c = 3000 PSI (20.7 MPa)	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)
5/16 (7.9)	1-1/4 (31.8)	1-9/16 (39.7)	1,050 (4.7)	1,330 (5.9)
		2-3/16 (55.6)	1,205 (5.4)	1,725 (7.7)
	1-3/4 (44.5)	1-9/16 (39.7)	2,020 (9.0)	1,530 (6.8)
		2-3/16 (55.6)	2,250 (10.0)	2,505 (11.1)
	2-1/4 (57.2)	1-9/16 (39.7)	2,850 (12.7)	1,955 (8.9)
		2-3/16 (55.6)	3,120 (13.9)	3,250 (14.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

1. Pilot hole diameter shall be 0.263" and drilled 1/4" longer than the necessary embedment.
2. Allowable loads are based ultimate test load divide by 4.
3. Recommended center to center distance of 3-3/4" is required for 100% efficiency and 1-7/8" for 50% efficiency.
4. Embedment is through 1-1/4" face shell of hollow block.

Tapcon® XL Anchors		Ultimate Tension & Shear Values in Concrete Masonry Units				
ANCHOR DIA. In. (mm)	MINIMUM DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE (Inches)	HOLLOW CORE¹		GROUT-FILLED²	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
5/16 (7.9)	1-1/4 (31.8)	4	1,045 (4.6)	2,280 (10.1)	1,045 (4.6)	2,280 (10.1)
	1-3/4 (44.5)	4	NOT RECOMMENDED	NOT RECOMMENDED	1,950 (8.7)	2,825 (12.6)
	2-1/4 (57.2)	4	NOT RECOMMENDED	NOT RECOMMENDED	3,770 (16.8)	3,140 (14.0)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

1 CMU = 1,600 PSI minimum compressive strength.

2 CMU = 1,600 PSI minimum compressive strength with 2,000 PSI grout.

Tapcon® Storm Guard Anchors



APPLICATIONS



Direct mount permanent anchors for quick and easy installations for metal and plywood panels to wood, hollow block and concrete.

DESCRIPTION/SUGGESTED SPECIFICATIONS

DIRECT MOUNT PERMANENT ANCHORS FOR QUICK AND EASY INSTALLATIONS OF METAL AND PLYWOOD PANELS TO CONCRETE AND BLOCK.



ADVANTAGES

- White UltraShield™ for corrosion protection in coastal environments.
- 1/4-20 x 7/8" external thread above collar.
- No caulking required.
- Threaded chamfered safety collar prevents overdriving.
- 3/16" Hex Drive.
- Use with ANSI standard 3/16" carbide-tipped drill bit. (bit not included)

CORROSION RESISTANCE

Salt Spray Test (ASTM B117) White UltraShield
1500 Hrs no red rust

APPROVAL/LISTINGS

Miami-Dade County – #11-0616.04

For the most current approvals/listings visit: www.itw-redhead.com

INSTALLATION STEPS

Read installation instructions before using!



CAUTION:

DO NOT BEND DRILL BIT.

DO NOT FORCE THE DRILL BIT INTO BASE MATERIAL.

3/16" Nut Driver Installation Tool
(Part # 3426910)



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).




WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

Tapcon® Storm Guard Anchors

SELECTION CHART

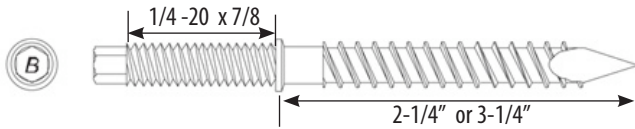

Tapcon® Storm Guard Anchors

Diameter.....1/4"
Point Type.....Nail

Thread Form..... Original Notched Hi-Lo™
Finish.....UltraShield™

PART NO.	DESCRIPTION	COATING	BOX QTY
3424100	1/4" dia. x 2-1/4"	White UltraShield	1,000
3426910	3/16" Nut Driver	---	1
3095910	3/16" x 3-1/2" Carbide-tipped Drill Bit	---	1

PERFORMANCE TABLES

Tapcon® Storm Guard Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Concrete

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	f'c = 3000 PSI (20.7 MPa)	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	1-1/4 (31.8)	1,230 (5.5)	1,339 (6.0)
	1 (25.4)	2-1/2 (63.5)	1,701 (7.6)	2,333 (10.4)
	1-3/4 (44.5)	1-1/4 (31.8)	2,704 (12.0)	1,375 (6.1)
	1-3/4 (44.5)	2-1/2 (63.5)	2,844 (12.6)	2,618 (11.6)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

Tapcon® Storm Guard Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Hollow Concrete Masonry Units

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	f'c = 1500 PSI (10.4 MPa)	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1-1/4 (31.8)	1-1/4 (31.8)	1,955 (8.7)	536 (2.4)
	1-1/4 (31.8)	2-1/2 (63.5)	1,940 (8.6)	1,088 (4.8)


Tapcon® Storm Guard Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Grout-Filled (CMU)

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	GROUT-FILLED (CMU) f'c = 2000 PSI (13.8 MPa)	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1-3/4 (44.5)	1-1/4 (31.8)	3,335 (14.8)	1,207 (5.4)
	1-3/4 (44.5)	2-1/2 (63.5)	3,779 (16.8)	2,061 (9.2)

SAMMYS®

SSC Hurricane Protection Anchors

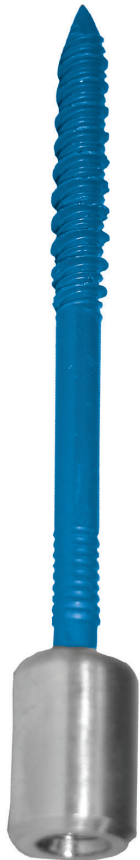

APPROVAL/LISTINGS

Miami Dade County # 11-0616.04

For the most current approvals/listings
visit: www.itw-redhead.com

APPLICATIONS



Direct mount permanent anchors for quick and easy installations for metal and plywood panels to hollow block and concrete.

DESCRIPTION/SUGGESTED SPECIFICATIONS

SPECIFIED FOR SECURING SHUTTERS

Low profile permanent anchors for quick and easy secure shutter installations.

ADVANTAGES

- Thread: 1/4-20 internal thread
- Thread Depth: 5/8"
- Head Diameter: 1/2"
- Head Length: 3/4"
- Cap made of 304 stainless steel will never rust.
- "Original" Tapcon® 1/4 dia. anchor with Blue Climaseal™.
- T25 torx® driver for fast and easy installations.

SELECTION CHART

SAMMYS Hurricane Protection Anchors			Diameter.....1/4"	Thread Form.... Original Notched Hi-Lo™
			Point Type....Nail	Finish.....Blue Climaseal™
PART NO.	ANCHOR LENGTH	BOX QTY		
8167957	3-1/4"	125		
8155957	6"	125		
8182910	Installation Tool	1		

PERFORMANCE TABLES

SAMMYS Hurricane Protection Anchors			Ultimate Tension and Shear Values (Lbs/kN) in Concrete		
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	f'c = 3295 PSI (22.7 MPa)		
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	
1/4 (6.4)	1 (25.4)	1-1/4 (31.8)	1,533 (6.8)	1,166 (5.2)	
	1 (25.4)	2-1/2 (63.5)	2,024 (9.1)	1,264 (5.6)	
	2-1/4 (57.2)	1-1/4 (31.8)	2,972 (13.2)	1,342 (6.0)	
	2-1/4 (57.2)	2-1/2 (63.5)	3,099 (13.8)	1,906 (8.5)	

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

SAMMYS Hurricane Protection Anchors			Ultimate Tension and Shear Values (Lbs/kN) in Hollow Concrete Masonry Units		
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	f'c = 1500 PSI (10.4 MPa)		
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	
1/4 (6.4)	1-1/4 (31.8)	1-1/4 (31.8)	1,388 (6.2)	526 (2.3)	
	1-1/4 (31.8)	2-1/2 (63.5)	1,427 (6.3)	1,056 (4.7)	

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

SAMMYS Hurricane Protection Anchors			Ultimate Tension and Shear Values (Lbs/kN) in Grout-Filled (CMU)		
ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	EDGE DISTANCE	Hollow Block f'c = 2000 PSI (13.8 MPa)		
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	
1/4 (6.4)	2-1/2 (63.5)	1-1/4 (31.8)	3,011 (13.4)	1,086 (4.8)	
	2-1/2 (63.5)	2-1/2 (63.5)	3,332 (14.8)	1,317 (5.9)	

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity. Divide by 4.

Hammer-SetTM Anchors

Nail-Drive Anchors



APPLICATIONS



*For overhead applications refer to page 79 for Redi-Drive information and performance data

NOT FOR USE IN OVERHEAD APPLICATIONS*

- Electrical boxes
- Conduit clips
- Drywall track
- Roof flashing

DESCRIPTION/SUGGESTED SPECIFICATIONS

Hammer-Set Nail Drive Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE



Hammer-Set
Nail-Drive
Anchor

The Hammer-Set one-piece zinc plated steel anchor consists of an expansion body and expander drive pin. Anchors meet or exceed GSA specification A-A-1925A Type 1. (Formerly GSA: FF-S-325 Group V, Type 2, Class 3)


ADVANTAGES

- Fast, easy installation
- Works in concrete, block and brick
- Install through material to be fastened
- Low profile mushroom head style


APPROVALS/LISTINGS

Meets or exceeds GSA specification A-A-1925A Type 1 (Formerly GSA: FF-S-325 Group V, Type 2, Class 3)


INSTALLATION STEPS




1.



2.



3.



4.

1. Drill proper size hole through material to be fastened into base material. (See Chart for bit size).
2. Clean hole.
3. Insert Hammer-Set into hole until head of anchor body is flush with material to be fastened. Tap the nail until flush with head of anchor. Ensure minimum embedment is 1/4" deeper than anchor embedment. Be sure head is firmly against fixture
4. Anchor is now set. ** NOT RECOMMENDED FOR OVERHEAD **

SELECTION CHART

Hammer-Set

PART NUMBER	DESCRIPTION In. (mm)	DRILL SIZE In. (mm)	MAX. FIXTURE THICKNESS In. (mm)	MIN. EMBEDMENT In. (mm)	MIN. HOLE DEPTH In. (mm)	QTY/WT PER BOX lbs.	QTY/WT PER MASTER CTN - lbs.
HS-1607	3/16 x 7/8 (4.8 x 22.2)	3/16 (4.8)	1/4 (6.4)	5/8 (15.9)	1-1/8 (28.6)	100/ 2.0	1000/ 20
HS-1406	1/4 x 3/4 (6.4 x 19.1)	1/4 (6.4)	1/8 (3.2)	5/8 (15.9)	1 (25.4)	100/ 2.2	1000/ 22
HS-1410	1/4 x 1 (6.4 x 25.4)	1/4 (6.4)	1/4 (6.4)	3/4 (19.1)	1-1/4 (31.8)	100/ 2.4	1000/ 24
HS-1412	1/4 x 1-1/4 (6.4 x 31.8)	1/4 (6.4)	1/2 (12.7)	3/4 (19.1)	1-1/2 (38.1)	100/ 2.6	1000/ 26
HS-1414	1/4 x 1-1/2 (6.4 x 38.1)	1/4 (6.4)	3/4 (19.1)	3/4 (19.1)	1-3/4 (44.5)	100/ 2.8	1000/ 28
HS-1420	1/4 x 2 (6.4 x 50.8)	1/4 (6.4)	1-1/4 (31.8)	3/4 (19.1)	2-1/4 (57.2)	100/ 3.5	1000/ 35

PERFORMANCE TABLE

Hammer-Set

Ultimate Tension and Shear Values in Concrete (Lbs/kN)

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/16" (4.8)	5/8" (15.9)	500 (2.2)	450 (2.0)
1/4" (6.4)	5/8" (15.9)	700 (3.1)	700 (3.1)
1/4" (6.4)	3/4" (19.1)	800 (3.5)	800 (3.5)
1/4" (6.4)	1" (25.4)	950 (4.2)	800 (3.5)
1/4" (6.4)	1-1/4" (31.8)	1,100 (4.9)	1,100 (4.9)

Safe working loads for single installations under static loading conditions should not exceed 25% of the ultimate capacity. Divide ultimate values by 4.

ITW Red Head

Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Poly-Set® Anchors

The Truly Versatile Plug Anchor



PS-0608SP




PS-1012SP



DESCRIPTION/SUGGESTED SPECIFICATIONS

Plug Anchors — SPECIFIED FOR ANCHORAGE INTO ALL BASE MATERIALS




The Poly-Set is a polyethylene expansion anchor designed for fastening into drywall, hollow block, brick and solid concrete.

ADVANTAGES

- Unique twisting action provides superior holding over standard plug anchors
- Resistant to moisture, chemicals or atmospheric conditions—can be used anywhere
- Pre-packaged in kits with matching screws and carbide-tipped drill bit
- Works well in *all* base materials

INSTALLATION STEPS

For Solid Concrete



1. Drill hole at least 1/4" deeper than anchor length and insert anchor until flange is flush.




2. Fasten fixture by inserting sheet metal screw through fixture and into anchor.




3. Tighten screw.


For Hollow Material



1. Drill hole and insert anchor until flange is flush.



2. Fasten fixture by inserting sheet metal screw through fixture and into anchor.



3. Expand anchor after screw head is against fixture, tighten screw the number of additional turns indicated on the chart below.

DRYWALL THICKNESS	PS-0608S	PS-1012S
3/8"	7 - 9 Turns	— — — —
1/2"	5 - 7 Turns	8 - 9 Turns
5/8"	3 - 4 Turns	6 - 7 Turns
3/4"	1 - 2 Turns	4 - 5 Turns

Approximate number of additional turns after screw head is against fixture for indicated thickness of hollow wall.

SELECTION CHART

Poly-Set Anchors

PART NUMBER	DRILL BIT SIZE	ANCHOR LENGTH	SCREW SIZE	GRIP RANGE	QTY/WT PER BOX (lbs.)	QTY/WT PER MASTER CTN (lbs.)
PS-0608SP	3/16	1-1/4	#6 - 8	3/8 - 3/4	100/ 0.9	1000/ 2
PS-1012SP	9/32	1-7/16	#10 - 12	1/2 - 1	100/ 1.8	1000/ 4

PERFORMANCE TABLES

Average Ultimate Tension Load in Various Base Materials

PART NUMBER	DRYWALL (1/2")	CONCRETE (2000 PSI)	CONCRETE (4000 PSI)	HOLLOW BLOCK (CMU)
PS-0608SP	110 lbs.	225 lbs.	265 lbs.	235 lbs
PS-1012SP	145 lbs.	355 lbs.	390 lbs.	385 lbs

Allowable load values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Poly-Set Kits

PART NUMBER	DRILL BIT SIZE	KIT CONTAINS	GRIP RANGE	QTY/WT PER BOX (lbs.)	QTY/WT PER MASTER CTN (lbs.)
PS-0608SKP	3/16	100 1-1/4" anchors/100 #8 screws	3/8 - 3/4	1/ 1.0	10/ 11
PS-1012SKP	9/32	50 1-7/16" anchors/50 #10 screws	1/2 - 1	1/ 1.2	10/ 12