


Accessories



Wire Brush Extensions

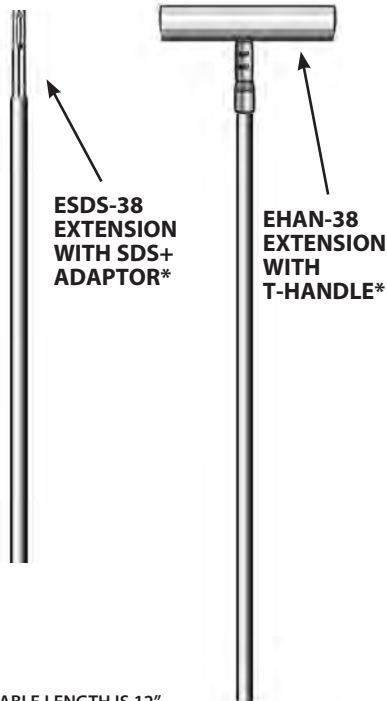

ESDS-38
EXTENSION
WITH SDS+
ADAPTOR*

EHAN-38
EXTENSION
WITH
T-HANDLE*

* USABLE LENGTH IS 12",
GOOD FOR ALL HOLES EXCEPT 7/16" DIAMETER

DESCRIPTION/ADVANTAGES

Hole Plugs

Special plugs make overhead installations easier, centers rod in hole, and keeps adhesive off threads



ROD DIAMETER	HOLE DIAMETER	PART #	QTY
3/8"	7/16"	E038	25
1/2"	9/16"	E012	25
5/8"	3/4"	E058	20
3/4"	7/8"	E034	20
7/8"	1"	E078	10
1"	1-1/8"	E010	10
1-1/4"	1-3/8"	E114	10

Nylon Brushes

Proper hole cleaning using a brush is essential to achieve optimum performance



SIZE DIA.	DESCRIPTION	PART #	QTY
1/2"	Nylon Brush	B012	1
3/4"	Nylon Brush	B034	1
1"	Nylon Brush	B100	1
1-1/4"	Nylon Brush	B114	1
1-1/2"	Nylon Brush	B112	1

Wire Brushes

Proper hole cleaning using a brush is essential to achieve optimum performance



1/8" NPT
(National Pipe
Thread Taper)

PART #	ANCHOR DIA.	REBAR	DRILL BIT DIA.	BRUSH DIA.	QTY/BAG
SB038	3/8"	No. 3	7/16"	5/8"	4
SB012	1/2"	—	9/16"	3/4"	4
SB058	5/8"	No. 5	3/4"	1"	4
SB034	3/4"	No. 6	7/8"	1-1/4"	4
SB078	7/8"	—	1"	1-1/2"	4
SB010	1"	No. 7	1-1/8"	1-5/8"	4
SB125	1-1/4"	—	1-3/8"	1-3/4"	4
ESDS-38	Wire brush 12" usable extension with SDS+ adaptor				1
EHAN-38	Wire brush 12" usable extension with T-Handle				1

* Proper hole cleaning using a wire brush is essential to achieve optimum performance. Brush may be used up to 50 holes depending on concrete strength. Brushes required for installation of No. 4, No. 8 rebar and larger are available with lead time.

Plastic Extension Tubing

Attaches to Adhesive System nozzles for deep hole installations



DESCRIPTION	PART #	QTY
6-Foot Straight Tubing can cut to proper size (.39 in I.D. x .43 in. O.D.)	E25-6	6

Blow Pump



DESCRIPTION	PART #	QTY/BAG
Blow Pump	BP-10	1

Minimum hole 7/16".